



SAFETY SUPPLIES FROM THE GROUND UP 2015 • 2016

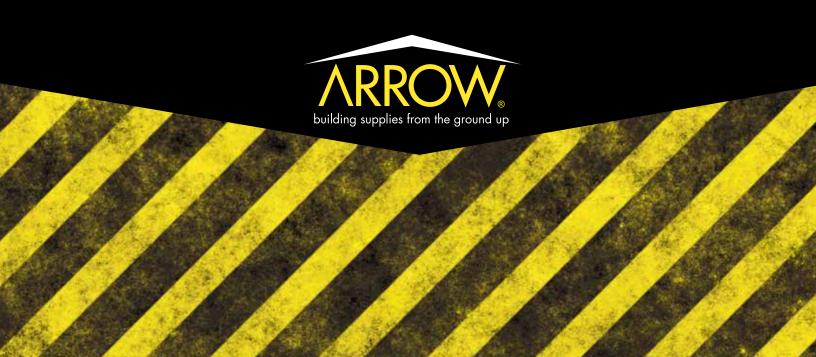

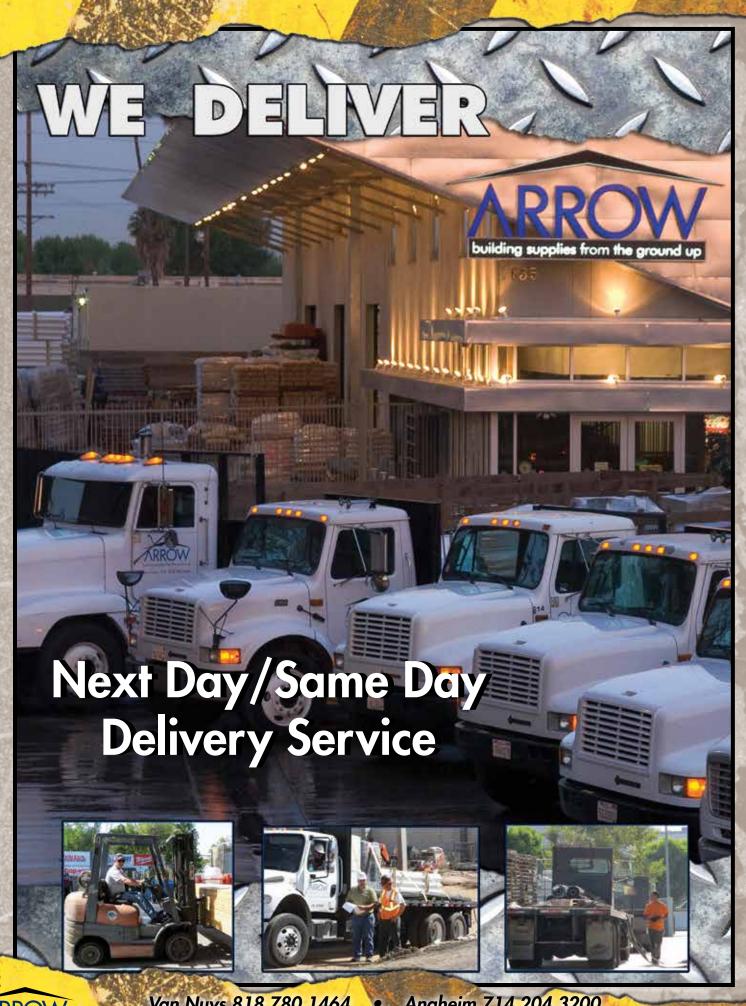


ASK THE PROFESSIONALS

TABLE OF CONTENTS

Personal Protection	4	4 – 43
Head Protection	4	-7
Face Protection		
Eye Protection		
Hearing Protection		
Respiratory Protection		
Hand Protection	20	-23
Work Wear	24 -	- 31
Foot Wear	31 –	- 32
Knee Protection		
Heat Stress		
First Aid	40 –	- 43
Fall Protection		
Harness		
Accessories		
Tools at Heights		
Lanyards		
Lifelines		
Adaptors		
Anchors		
Hoists		
Netting		
Guardrails Ladders		
Ladders	/4-	-//
Jobsite Safety	78	- 80
Caution	/ ð - 70	- / ð - 70
RiggingSecurity	9 - - 80 -	81
Communications		
Atmosphere Control		
Containment/Erosion		
THE PARTY OF THE P		

Facility/Jobsite Sa	fety89 – 99
Containment	89 – 90
Absorbancies	91 – 93
Protectors	94 – 95
Fire Prevention	96 – 99
Traffic Safety	100 - 105
Warning Panels	100 – 101
Barricades	
Signs	
Parking	
General	106 - 125
Electrical	107 – 109
Lighting	109 – 114
Safe Start Check Lis	
Floor Protection	116 – 116
Dust Prevention	
Clean Un	118 - 122

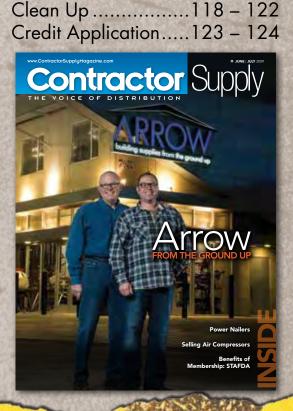



What's up with hard hat safety!

OSHA requires the use of ANSI-compliant head protection to help prevent serious injuries.

ANSI Z89.1-2009

Industrial head protective helmets meeting the requirements of the 2009 standard are classified as:

Type I: Protects against hits to the top of the head.

Type II: Protects against hits to the top and lateral sides to the head.

The three classes indicate the helmets electrical insulation rating.

Class E (electrical) tested to withstand 20,000 volts.

Class G (general) tested to withstand 2200 volts.

Class C (conductive) provide no electrical protection.

HARD HAT SUSPENSIONS

KNOW THE DIFFERENCE!

Pin Lock Suspension



Adjust by inserting pin into corresponding hole

Ratchet Suspension



Adjust by turning a knob in the rear of the hard hat

Swingstrap Suspension



Adjust by squeezing separating suspension to best fit

Suspensions are available in 4, 6 and 8 points. The more points, the better the distribution of impact.

E2 Thermoplastic Hard Hats

- 8 pt. ratchet
- Smooth crown design
- Meets ANSI Z89.1-2009
 Type 1, Class E



Roughneck P2 Hard Hat

- 8 pt. ratchet
- Meets ANSI Z89.1-2009 CSA Z94.1-2005 Type 1,Class G



E2 Cap Style Hard Hat

- Ratchet headband
- 8 pt. suspension
- Quick lok blocks
- Meets ANSI Z89.1-2009
 Type 1, Class E



FIBE2QRW

IBHE-METAL

E2 Flag Hard Hat

- Swingstrap
- 360° padded sweatband
- Meets ANSI Z89.1-2009 Type 1, Class E



FMX Hard Hats

- · Colorful designs that won't chip, fade nor peel
- Smooth thermoplastic crown deflects impacting objects
- 8 pt. suspension disperses impact energy
- Meets ANSI Z89.1-2009 Type 1, Class E



FIBE2RWX1



FIBE2RWX2



FIBE2RWX3

E1 Full Brim Thermoplastic Hard Hats

- 8 pt. ratchet
- Meets ANSI Z89.1-2009
 Type 1, Class E



Spirit of America Hard Hats

- Overlay design that's heat and scratch resistant
- Meets ANSI Z89.1-2009
 Type 1, Class E



Thermo Plastic Welding Helmets

- Light weight and full size
- Lifetime warranty on helmet and headgear



Flame



JZ777JV71JAJ

IBHE-METAL

Skull Guard Hard Hats

Consists of a polyethylene shell and suspension system



Compliance Kit

- Includes: Hard hat, ear plugs leather gloves & safety glasses
- Universal size
- Kit designed for tradespeople



Peak Hard Hats

- 4 pt. pin lock nylon suspension
- A29: Meets ANSI Z89.1-2009 Type 1, Class E
- A79: Meets ANSI Z89.1-2009 Type 1, Class, CSA Z94 1-2005 Type 1, Class E



Vented Ridgeline Premium Hard Hats

- 4 pt. position harness points
- Rear padded suspension, vented pressure pad
- Swing hinge points







Sun Shroud

• Size 12" x 14"

FIBFMSS20E

Neck Guards

Elastic bands to fit over most hard hats

ERB19281 – HI-VIS LIME
ERB19282 – ORANGE

PERSONAL PROTECTION- HEAD/FACE

Terry Sweatband for Hard Hats

- Fits most hard hat suspension systems
- Machine washable



Hard Hat Sweat Band

- Air cushioned
- Will not slip



FIBFM22R



Hard Hat Sunshield

- Use with full brim hard hat
- Blocks 99.9 of UV



High Performance Face Shield Headgear

- Provides 40% more protective area than standard faceshields
- Meets ANSI Z87.1, CSA Z94.3 standards



High Performance Face Shield Hard Hat Adapter

- Hard hat and full brim
- Dielectric bracket



Protecto-Shield

 Tough thermoplastic for superior heat protection



HONEY11340143



Face Shield Replacement

- Wide vision
- Clear, wide View 8" x 16 1/2"
- Meets ANSI Z87.1, CSA Z94.3



Mesh Face Shield

Epoxy coated steel for glare



M3 Cap Mounted Earmuff

- NRR 24
- Slots easily into most hard hats
- Can be locked into standby position for storage




PERSONAL PROTECTION- EYES

IGHT TRANSMISSION GRAPHS



Anti-Reflective

Light silver mirror coating provides just enough reflection of light for indoor and outdoor conditions.








65% of the total amount of light passes through this ANTI-REFLECTIVE lens



Yellow

Enhances available light for low light conditions or after dusk driving.








80% of the total amount of light passes through this YELLOW lens



Copper

Filters out Blue Light or haze which can cause eye fatigue, tired, strained, or sore eyes. Specifically engineered as a high contrast driving lens to give you greater depth perception.








8% of the total amount of light passes through this COPPER Driving lens



Smoke

The perfect all-around tint for standard shading in normal light conditions.








16% of the total amount of light passes through this <code>SMOKE</code> lens



Silver Mirror

Similar to Smoke lens properties, but has the added Silver Mirror lens coating which reflects more light, making it ideal for bright light conditions.








13% of the total amount of light passes through this SILVER MIRROR lens



Aqua Precision Red

The Aqua-based color of this lens maximizes clarity and contrast. The technology in this lens was originally designed by NASA as a reflective coating for satellite portholes.








13% of the total amount of light passes through this AQUA PRECISION RED lens



Polarized Copper

Filters out Blue Light or haze which can cause eye fatigue, tired, strained, or sore eyes. Specifically engineered as a high contrast driving lens to give you greater depth perception, and also offers the added feature of a polarized lens as described on page 7 under "Light Management."








8% of the total amount of light passes through this **POLARIZED COPPER Driving lens**



Polarized Aqua Precision Blue

The Aqua-based color of this lens maximizes clarity and contrast. The technology in this lens was designed by NASA as a reflective coating for satellite portholes, and also offers the added feature of a polarized lens as described on page 7 under "Light Management."








10% of the total amount of light passes through this POLARIZED AQUA PRECISION BLUE lens

Aqua Precision Lens



Exposure to high levels of light without proper sunglass lens filtration may cause



Polarized Lens



BRAZEAU

Black Lens Anti-Reflective

 Provides just enough reflection of light for indoor/outdoor



EDGEXB111AR

Black/Smoke Lens

White/Smoke Lens

 Perfect tint for standard shading in normal light conditions



EDGEXB146

FOGE

DESIGNER SERIES

APOCALYPSE1



EDGEXB116-A1

APOCALYPSE2



EDGEXB116-A2

PATRIOT1



EDGEXB116-P1

PATRIOT2



EDGEXB146-P2

VELOCITY1



EDGEXB116-C1

VELOCITY2



EDGEXB146-C2

VIGILANTE2



EDGEXB146-V2

KAZBEK

Black/Silver Mirror Lens

 Has added Silver Mirror lens coating to reflect more light



EDGESK117

Black Polarized Aqua Precision Blue Lens

 Aqua-based color maximizes clarity and contrast



EDGETSKAP218

FOGE

KAZBEK XL

Black/Polarized G - 15 Mirror Lens

 Maximizes the transmission of light, provides contrast and image definition



EDGETSK-XL21-G15-7



Black/Silver Mirror Lens RECLUS

 Has added Silver Mirror lens coating to reflect more light



EDGESR117

Black/Smoke Lens

 Perfect tint for standard shading in normal light conditions



DELANO Clear/Clear



EDGESD111



PERSONAL PROTECTION- EYES

KHOR

Black/Aqua Precision Red Mirror Lens

• The Aqua-based color of this lens maximizes clarity and contrast



EDGESDKAP119

Digital Camo/Polarized Kit

 Includes: Yellow lenses, Anti-Reflective lenses, Lens cleaning bag, interchangeable lens bag and hard case



BARETTI

Black/Aqua Precision Red Mirror Lens

• The Aqua-based color of this lens maximizes clarity and contrast



DAKURA

Black/Clear



EDGESW111

Black/Anti-Fog Smoke

 Anti-Fog Polycarbonate lenses have a coating that is scratch-resistant but repels fog and steam



EDGESW116AF

Lens Cleaning Bag



EDGE9802



DAKURA – CAMOUFLAGE

Yellow Lens

 Enhances available light for low light conditions or after dusk driving



EDGESW112CF

Polarized Copper Driving Lens

• Filters out Blue Light or haze, which can cause eye fatigue



EDGETSM215CF



FOGE



Outlander Black Frame Safety Glasses

- Dual lens style with wide temples
- Soft nose piece provides comfort
- Full eye protection
- 99% UV protection

Clear





Ice Blue Mirror



PYRSB8065D



Outlander Black/Gold Frame Safety Glasses

- Dual lens style
- Soft nose piece
- Full eye protection
- 99% UV protection



PYRSBG8018D



Goliath Black Frame Safety Glasses

- Polycarbonate lens gives unrestricted vision
- Comfort fit, rubber temples
- 99% UV protection

Indoor/Outdoor Mirror

Gray



PYRSB5620D



PYRSB5680D



Outlander Caramel Frame Safety Glasses

- Dual lens style
- Soft nose piece
- Full eye protection
- 99% UV protection



PYRSCM8018D



Goliath White Frame Safety Glasses

- Polycarbonate lens gives unrestricted vision
- Comfort fit, rubber temples
- 99% UV protection

Ice Blue Mirror

Gray



PYRSW5620D

ice bloc Militor



PYRSW5665D



Outlander Nickle Frame Safety Glasses

- Dual lens style
- Soft nose piece
- Full eye protection
- 99% UV protection



PYRSNK8020D



PERSONAL PROTECTION- EYES

PMXTORQ Safety Glasses

- Wide, straight back temples provides secure fit in all conditions
- Ventilated nose piece allows heat to dissipate
- 99% UV protection









PYRSB6920D PYRSB6965D PYRSB6980D



Zteck Safety Glasses

- Economical wrap-around single lens
- Integrated nose piece
- 99% UV protection



PYRS2520S



PYRS2580S



Venture II Safety Glasses

- 9.75 base curved clear lens provides full side protection
- 99% UV protection



Indoor/Outdoor Mirror Anti-Fog



PYRSB181OS PYRSB188OST



V2G Sealed Eyewear

- Vented lens and frames
- 99% UV protection
- Clear lens, anti-fog



PYRGB1810ST



Carbondale Industrial Safety Eyewear

- Flexible, dual injected temples
- Full frame for perfect fit
- Meets high impact requirements



Thunder Bay Safety Eyewear

- Half frame design
- Sleek & wide dual injected temples
- Meets high impact requirements





Reader/Magnifier

- Sporty, 8-base wrap-around polycarbonate lens
- Scratch resistant hardcoat



HONEYA950 — +1.50 HONEYA951 — +2.00 HONEYA952 — +2.50



Uvex Seismic® Sealed Eyewear

- Provides protection
- Meets ANSI Z87.1-2010, use with and without cushion lined frame
- Meets CSA Z94.3 standard only with subframe in place



Uvex Stealth® Goggle

- Fits comfortably over most prescription eyewear
- Ideal for high impact
- Meets ANSI Z87.1-2010, CSA Z94.3 standards



Safety Goggle

- Economical splash goggle
- Fits over most eyewear
- Meets ANSI Z87.1-2010, CSA Z94.3 standards



Lens Cleaning Towelettes

- Pocket size pre moistened
- 100 towelettes per box



Eyewash Station


- 2- 32 oz. bottles
- Wall mounted



NOR127042

Honeywell

Hear today gone tomorrow - use your hearing protection

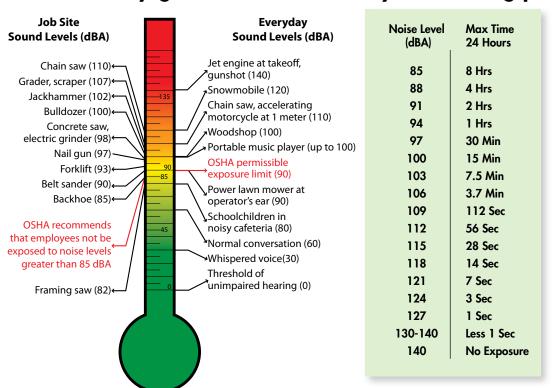

Sound level taken from ANSI/ASSE A10.46.2007; The Occupational Environment -Its Evaluation, Control and Management, 2nd Edition, AIHA, 2003; and Noise and Hearing Loss in the Construction Industry, School of Public Health and Community Medicine, University of Washington, 2004.

USE THE 2-3 FOOT RULE

When a sound level meter is not available, you should use the 2 to 3 foot rule: Stand about an arm's length away from your coworker: If you have to raise your voice to be heard 2-3 feet away, you should assume that the sound level is at or above 85 dBA.

Z2 Economy Earmuff

- NRR 25, over the head
- Multi-position headband
- Molded grips for easy fitting



MX-5 Earmuff

- NRR 27, overmolded & cushion-ribbed headband is durable and comfortable
- Larger ear cushions, fits almost all ears comfortably



MX-6 Earmuff

- NRR 30, exclusive waffled cup foam for superior protection
- Lightweight wire frame allows easy cup adjustment yet holds its position



PERSONAL PROTECTION- HEARING

Glide® Foam Tip Earplugs

- Unique multi-curved stem rotates for a custom fit
- Highest NRR of any No-Roll plug in the market

NRR 30 dB



MOLDEX

MOLDEX6940 Uncorded 100/box

Glide® Triple Flange **Earplugs**

- Reusable & washable
- Unique multi-curved stem rotates for a custom fit

NRR 30 dB



MOLDEX6445 Corded 50/box

SparkPlugs® PlugStation®

- Give easy access to earplugs anywhere
- Hygenic from dispenser to hand
- 500 pairs of NRR 33 earplugs



MOLDEX6645



Flip to Listen® Earplugs

MOLDEX6945 Corded 100/box

- Dual mode: NRR 24 closed cap / NRR 4 open cap
- Reusable & washable
- Includes: cloth cord & case



Meteors® Foam Earplugs

- Follows the shape of ear canal
- Less pressure for all-day wear
- NRR 33 dB



MOLDEX6870 Uncorded 200/box MOLDEX6970 Corded 100/box



Corded SparkPlugs® **PlugStation®**

- Only corded earplug dispenser in the market
- Holds 150 pairs of corded NRR 33 earplugs



Mellows® Foam Earplugs

- Tapered for snug fit
- Extra-soft foam for all day comfort

NRR 30 dB



MOLDEX6820 Uncorded 200/box MOLDEX6840 Corded 100/box



SparkPlugs® Foam Earplugs

- Tapered design for snug fit
- Non-irritating smooth surface
- NRR 33 dB



MOLDEX6604 Uncorded 200/box MOLDEX6654 Corded 100/box



Meteors PlugStation®

MOLDEX6880

- Helps increase compliance
- Hygenic from dispenser to hand
- Holds 500 pairs of NRR 33 earplugs




MOLDEX6875



Rockets® Earplugs

- Easy grip handle
- Reusable & washable
- Soft, flexible flanges for superior seal
- NRR 27 dB









More Surface, More Comfort

Easier breathing and cool comfort are what you get when you wear an AirWave respirator. The larger surface area of the patent-pending wave design means more air flows in and out of the mask all without a valve! Easy breathing... by design.

More Flex, More Durability

The unique FlexFit design moves with your mouth for comfort all day long. More comfort means AirWave is a mask that your workers will want to wear, and that means more compliance. Plus the Dura-Mesh shell prevents collapsing from heat and humidity so your mask last longer.



More Air, More Wear

When you can breath easier and you're more comfortable, you'll want to keep wearing AirWave! Longer wear means less masks, less masks means more savings. Compliance and cost savings just got easier.

Outer Dura-Mesh® keeps Inner Dura-Mesh® prevents respirator clean looking. Collapsing from heat and humidity.


More Air, More Wear.

Filter is protected on both sides by Dura-Mesh® Softspun® lining is comfortable against the face.



Airwave N95 Particulate Mask with SmartStrap

- Exclusive easy-breathing wave design
- SmartStrap® Hangable and adjustable

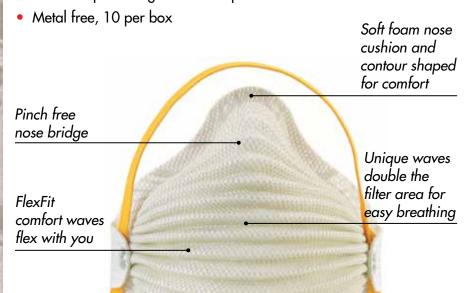

Cool inside without a valve

Cloth strap is soft and comfortable

MOLDEX4600

MOLDEX

Airwave N95 Particulate Mask

- Easy-breathing design
- Classic 2 strap, 10 per box



N95 Particulate Mask

- Dura-Mesh shell upholds in heat and humidity
- No metal nose band
- 20 per box



MOLDEX

NIOSH - Approved Protection Categories

Filter Type

- N Class particulate respirators are approved for solid and liquid particulates, excluding oils.
- **R Class** is for both oil and non-oil solid and liquid particulates, with a maximum 8-hour or one shift use restriction when used for oil mist.
- **P Class** respirators are approved for both oil and non-oil particulates and have no time use restriction.

Filter Efficiency Level

- **95** = 95% minimum filter efficiency in removing particulates.
- **99** = 99% minimum filter efficiency in removing particulates.
- **100** = 99.97% minimum filter efficiency in removing particulates.

N95 High Visibility Particulate Mask

- Dura-Mesh shell upholds in heat and humidity
- 20 per box



MOLDEX2200N95HV

N95 Particulate Mask with Valve


- Exclusive Dura-Mesh shell resists collapsing in heat and humidity
- Exhale valve reduces hot air build-up





MOLDEX2300N95

WOLDEX

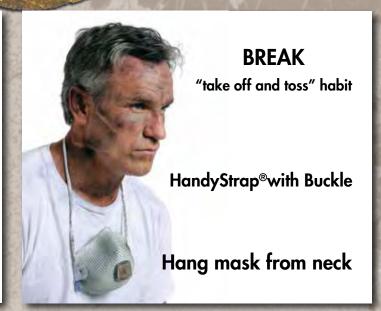

R95 Plus Nuisance Organic Vapors Mask

- HandyStrap & Dura-Mesh shell
- Ventex valve lets hot air out faster
- 10 per box



MOLDEX2840R95

MOLDEX

R95 Plus Nuisance Acid Gases Mask

- HandyStrap & Dura-Mesh shell
- Ventex valve lets hot air out faster
- 10 per box



MOLDEX2940R95

MOLDEX

N100 Particulate Respirator

- HandyStrap & Dura-Mesh shell
- Ventex valve lets hot air out faster
- 5 per box



MOLDEX MOLDEX

N95 with Nuisance Organic Vapors Mask

- HandyStrap & Dura-Mesh shell
- Ventex valve lets hot air out faster
- 10 per box



MOLDEXM2800N95

MOLDEX

7000 Series Half Mask Respirator

- Sleek design for modern, high-tech look and increased worker acceptance
- Light weight design plus extra-wide sealing area provides all-day comfort
- Mask drops down for convenient storage around the neck or locks down for custom fit



9000 Series Full Face Respirator

- Streamlined and ultra-light weight increases worker comfort and compliance
- Over-molded lens design for greater field of vision, less weight, fewer parts, less maintenance



Lightest weight facepiece of any popular model.

Weights less than 12.7 oz.



Completely free of metal parts



Panoramic lens with peripheral vision side panels

Easy mount bayonet cartridge/filter attachment

Attached exhale cover for easy inspection

MOLDEX9000



7000/9000 Filters



7000/9000 Gas/Vapor Cartridges

- Easy bayonet mount eliminates mis-threading
- Use with Moldex® N95, R95 or P100 filters for even greater flexibility

MOLDEX7100-Organic Vapors
MOLDEX7200-Acid Gases
MOLDEX7600-Multi-Gas/Vapor Smart Cartridge



Stacked Cartridge/Filters

- Cartridge + Adapter + Filter, each can be individually replaced for maximum usage
- Pre assembled



MOLDEX7140-Organic Vapor Cartridge/P100 MOLDEX7640-Multi-Gas/Vapor Smart Cartridge/P100

MOLDEX



Synthetic Vinyl Gloves

- Industrial grade
- Powder free
- 100 per box



Black Nitrle Gloves

- Industrial grade
- Powder free
- 100 per box
- Latex free





GLOVECONOMY

Blue Rubber Coated Gloves

- Light weight
- Natural rubber latex
- Puncture & abrasion protection
- Flexible & comfortable



V CONDON

Canvas Gloves

- Economy weight
- Cotton canvas, clute pattern
- Black PVC dots
- Knit wrist



Leather Palm Work Gloves

- Rubberized gauntlet cuff
- Gunn cut pattern
- Joint palm construction



Leather Palm Gloves

- Blue knit wrist
- Gunn cut pattern



Black PVC Gloves

- Double dipped
- Etched finish
- Interlock lining
- 14" length



High Vis Tipped Leather Drivers Gloves

- Standard grain cowhide
- Shirred elastic back
- Keystone thumb



Blue Welder Gloves

- Select shoulder split cowhide leather
- Reinforced palm
- Full sock lined with foam



GLOVEWELD7610

ARROW

CLC Blue Palm 3 Pack

- Cotton/polyester knit shell
- Natural latex rubber dip palm
- Crinkled finish on latex palm



Atlas Gloves

- Latex palm coating
- Breathable back
- Outperforms leather & cotton



Grabber-Dual Clip

- Keep gloves and items handy
- Breakaway feature
- Dielectric, non-conductive





ERG3400-BLACK ERG3400-YELLOW ERG3400-BLUE ERG3400-ORANGE



Worknit Cotton Gloves

- HD supported nitrile
- Heavy weight cotton lining
- Dry grip for non-slip
- Gunn cut, wing thumb style



Foamed PVC Coated Gloves

- Light & comfortable
- High abrasion resistance
- Extended knuckle coating for additional wearer protection
- Handles both wet and dry



Half Finger Trades Gloves

- Super dexterity and function
- 3/4 finger design
- Flex zones for added comfort



ERG712- M-L-XL



Lightweight Certified **Anti-Vibration Gloves**

- Chloroprene rubber palm
- Pre curved design provides comfort, dexterity, flexibility
- Elastic fit for secure fit



Hi-Vis Trades Gloves

- Cool mesh-backed
- Sure-grip palm
- Breathable polyester, Hi-Vis
- Durable synthetic leather palm and fingers



Dorsal **Impact-Reducing Gloves**

- Back hand impact protection
- Superior abrasion resistance
- Flex zones for high dexterity



Full-Fingered Trades Gloves

- Super dexterity and function
- Premium EVA pad dampens shock
- Abrasion resistant, textured PVC on palm & fingers
- Flex zones for added comfort



Lightweight Trades Gloves with Touch Control

- Tough PVC palms & single layer spandex
- Breathable stretch spandex, neoprene knuckles
- Abrasion resistant, PVC on palm & fingers
- Pull tab for easy on/off



Leather Trades Gloves

- Combines goatskin, Kevlar® and TPR armor
- Split leather reinforced fingertips
- Knuckle pad
- PU foam padded palm





At-Heights Construction Gloves

- · Comfort, durability and protection
- Ultra-durable double layer palm & fingertips
- EVA foam padding on upper palm
- Perforated neoprene knuckle pad and cuff



ERG750-M-L-XL



PVC Handler Gloves

- Textured PVC palm & fingertips
- Breathable 3 layer stretch spandex back
- Neoprene knuckle pad
- Ideal for wet or dry surfaces



ERG820- M-L-XL

Cut Resistant Handler Gloves

- Lined with 100% Kevlar® for level 3 cut
- Textured PVC palm & fingertips
- Breathable 3 layer stretch spandex back
- Ideal for wet or dry surfaces



ERG820CR- M-L-XL



Nitrile Dipped Dorsal Impact Reducing Gloves

Molded TPR armor for added protection

Foam nitrile coated palm

Lightweight, high dexterity



ERG920- M-L-XL

Class 5 Cut Protection Gloves

Seamless knit glove with super-durable gripping sandy foam nitrile palm

Nitrile-Dipped



ERG922CR-M-L-XL

Maxiflex® Ultimate™ Gloves

High-Vis seamless knit nylon/lycra

Nitrile coated micro-foam grip on palm and fingers



PIP34-874FY/L-XL

G-Tek[™] Touch Gloves

• Operate your touch screen phone

Urethane coated palm & fingers

Seamless kit polyester



PIP33-GT125/ S-XL

Zormax™ Cut Protection Gloves

Outstanding cut resistance, 360° breathability

Gray micro foam nitrile coated palm

EN cut level 3



PIP18-570/L

PIP56-530/XL

G-Tek Maxiflex® Ultimate™ Gloves

Ultra-light, knitwrist, Micro foam nitrile coated

Controlled grip with micro cup finish

Minimal palm thickness, thinner than most comparable gloves



PIP34-874/L-XL

MaxiDry® Concrete Finisher's Favorite Gloves

 Ultra lightweight nitrile coating on super fine gauge seamless knit liner

Great dexterity due to strategic coating placement



PIP56-630/L-XL

MaxiChem® Chemical Resistant Gloves

Ultra lightweight blended polymer, gauntlet cuff

Great dexterity due to strategic coating placement




ARRO

Heavy Worker Pants



BLAK168013802399





BLAK160013709499



BLAK163013102800

- Reinforced loose hanging utility pockets
- Leg pockets & kneepad pockets
- Triple stitching in heavy-wear areas
- Hammer loops

Light Duty Kneepads







Brawny Canvas Jacket

- Heavy weight, breathable
- Durable & comfortable



BLAK406213202800 — ANTIQUE KHAKI BLAK406213209900 — BLACK

Brawny Jacket with Hood



BLAK409213209900

Toughguy Pile Lined Jacket

- Heavy weight
- 100% cotton shell with super comfort polyester pile lining
- Excellent all around cold weather jacket
- Quilted sleeves, adjustable waist



BLAK481613709900

Two Fisted Fleece Jacket

- Tough three layer fleece
- 100% polyester shell
- Weather resistant membrane



BLAK485525209900

Two Fisted Fleece Jacket



BLAK384525209900

M12™ Heated Jackets

- 6 hours of continuous heat per charge
- 3 heat zones distribute heat to core body areas
- 3 heat settings plus warm up feature



M12™ Heated Hoodies

- 6 hours of continuous heat per charge
- 2 heat zones distribute heat to core body area
- 3 heat settings plus warm up feature
- Sizes M L XL 2XL –3XL





to power phones and accessories

M18TM Power Source

 Allows the use of M18 batteries to power heated jackets



MIL49-24-2371

M12™ 12V DC Plug Adapter

 12V DC vehicle adapter provides unlimited runtime



MIL49-24-2301

Class 2 Reversible Work Jacket

- 3M[™] Scotchlite[™]
- 2" Level 2 ANSI- compliant reflective
- Front zipper, two inner & three outer pockets



Class 3 Long Sleeve T-Shirt

- Polyester breathable knit
- ANSI- Compliant level 2 reflective
- One outside chest pocket



Class 3 Two- Tone Short Sleeve Vest

- 3M[™], Scotchlite[™] reflective material
- Sizes S-3XL available
- Zipper closure, one inside pocket



Class E Two-Tone Pants

- ANSI- Compliant level 2 reflective
- Hook & loop for easy on/off
- **Drawstring Waist**
- Sizes S-3XL available



ERG8911-L ERG8911

ANSI Classes

ANSI 107-2010 - Provide practical instruction regarding both reflective material and garment design. These guidelines also define classes of garments as most appropriate, depending on the level of risk in the work environment:

ANSI CLASS 1 - For workers who are well separated from traffic and working in areas where vehicle and/or equipment speeds do not exceed 25 mph. This class includes those directing parking operations, retrieving shopping carts from parking areas, maintaining sidewalks, making deliveries from vehicles, and working in warehouses where motorized equipment is present.

ANSI CLASS 2 - For workers in situations where complex visual backgrounds may be present. This class includes roadway construction workers, utility workers, survey crews, crossing guards, tollgate personnel, airport baggage handlers, first responders and law enforcement personnel.

ANSI CLASS 3 - High visibility garments for workers in the highest-risk situations, who need to be visible through a full range of body motions from a minimum distance of 1280 feet. This class includes highway maintenance and construction crews, utility workers, tow truck operators, survey crews, flaggers and emergency response personnel.

ANSI CLASS E - Applies to retroreflective equipped pants or shorts, designed to be worn in combination with either Class 2 or Class 3 tops. When worn in this manner, the ensemble is rated as Performance Class 3.

Back Support Hi-Visible

- 8" stretch bias with adjustable, detachable suspenders
- Sizes M-L-XL-2XL



Class 2 T-Shirt

- Lightweight birdseye knit and wicking treatment
- One outside pocket
- Sizes S-5XL available



ITEM#	SIZE	COLOR
21502	S	Hi-Vis Lime
21503	M	Hi-Vis Lime
21504	L	Hi-Vis Lime
21505	XL	Hi-Vis Lime
21506	2XL	Hi-Vis Lime
21507	3XL	Hi-Vis Lime
21508	4XL	Hi-Vis Lime
21509	5XL	Hi-Vis Lime

ERG8289

Class 2 Surveyors Vest

- ANSI- Compliant level 2 reflective
- Sizes S-3XL available
- Front zipper, two inner & two outer pockets

ERG8249Z-L ERG8249Z



Economy Mesh Class 2 Safety Vest

- ANSI- Compliant polyester mesh
- Hook and loop closure & one inside pocket
- Sizes L-XL available





Reflective Cooling Vest

- Lightweight, durable, washable remains hydrated up to 4 hours
- Hook & loop closure, one outside pocket
- Sizes M-2XL available



ERG6675

Class 2 – Two Tone Surveyors Vest

- ANSI- Compliant level 2 reflective
- Sizes S-3XL available
- Zipper closure, two inside,
 4 outside pockets

ERG8248Z-L ERG8248Z



Class 2 Heavy Duty Surveyors Vest

- 300D oxford polyester solid front, mesh back for breathability
- Heavy-duty #10 zipper closure
- 7 pockets

ERG8254HDZ-L/XL ERG8254HDZ-2XL/3XL



Non- Certified Standard Vest

- Mesh, hook and loop closure
- Sizes S-3XL



ergodyne

ERG8020HL-LIME ERG8020HL

ARC FLASHWAP

PPE CATEGORY LEVEL CHART



What Personal Protection Equipment (PPE) You Shall Wear:

- [X] Cotton Undergarments
- [X] Long Sleeved Shirt (Natural Fiber)
- [X] Long Pants (Natural Fiber)
- [X] Safety Glasses or Goggles
- [X] Hearing Protection (Inserts)
- [X] Leather Gloves (as needed) or insulating Gloves w/Protectors



G DEL

CATEGORY

What Personal Protection Equipment (PPE) You Shall Wear:

- [X] Cotton Undergarments
- [X] Arc Rated Long Sleeved Shirt (or FR Coveralls)
- [X] Arc Rated Long Pants (or FR Coveralls)
- [X] Hard Hat with Arc Rated Face Shield
- [X] Hearing Protection (Inserts)
- [X] Safety Glasses or Goggles
- [X] Leather Gloves or Insulating Gloves w/Protectors
- [X] Leather Shoes (as needed)



CATEGORY

What Personal Protection Equipment (PPE) You Shall Wear:

- [X] Cotton Undergarments
- [X] Short Sleeved "T" Shirt (Natural Fiber)
- [X] Arc Rated (12cal) Arc Flash Hood or Hard Hat with Arc Rated Face Shield w/Sock Balaclava with Coveralls or Jacket & Bibs or 50" Coat with Leggings
- [X] Safety Glasses or Goggles
- [X] Hearing Protection
- [X] Arc Rated Leather Gloves or Insulating Gloves w/Protectors

THE RESERVE OF THE PARTY OF THE

[X] Leather Shoes



CATEGORY

What Personal Protection Equipment (PPE) You Shall Wear:

- [X] Cotton Undergarments
 - [X] Short Sleeved "T" Shirt (Natural Fiber)
 - [X] Arc Rated (25cal) Arc Flash Hood with Coveralls or Jacket & Bibs or 50" Coat with Leggings
 - [X] Hard Hat
 - [X] Safety Glasses or Goggles
 - [X] Hearing Protection
 - [X] Arc Rated Leather Gloves or Insulating Gloves w/Protectors
 - [X] Leather Shoes



What Personal Protection Equipment (PPE) You Shall Wear:

CATEGORY

- [X] Cotton Undergarments
- [X] Short Sleeved "T" Shirt (Natural Fiber)
- [X] Arc Rated (40cal) Arc Flash Hood with Coveralls or Jacket & Bibs or 50" Coat with Leggings
- [X] Hard Hat
- [X] Safety Glasses or Goggles
- [X] Hearing Protection
- [X] Arc Rated Leather Gloves or Insulating Gloves w/Protectors
- [X] Leather Shoes



& DEL

Always wear voltage rated rubber glove liners when working above 50 volts in all categories

Flame-Resistant Work Wear

- FR properties are built in, and won't wash or wear out
- Soft and breathable, special cellulosic fiber content for moisture management



11 cal Flame-Resistant Longsleeve Shirts

Knit T-shirt in 100% FR-treated cotton

Henley Longsleeve











OELAFWHLS10



8 cal Coverall Kit

OELAFW8-PFC

- Includes: a flame resistant shield ARC flash coverall, ARC flash high performance shield, hood kit and storage bag
- Kit meets NFPA 70E hazard risk category 2





40 cal Jacket & Bib Kit

- Includes: a flame resistant shield ARC flash jacket and bib, switch gear hood, hard hat, safety glasses and storage bag
- Kit meets NFPA 70E hazard risk category 4



















PERSONAL PROTECTION- WORK WEAR/FOOT WEAR

Tyvek Coveralls

- One size fits all
- Puncture & tear resistant



3M92054

Flame Resistant Unlined Coverall

- Cool, comfortable & breathable
- Provides dual hazard FR protection
- Comfort design



ERG7490: (CHEST SIZES 38' - 50")

COLOR	CHEST	30" INSEAM	32" INSEAM	34" INSEAM
Gray	38"	40301	40331	40361
Gray	40"	40302	40332	40362
Gray	42"	40303	40333	40363
Gray	44"	40304	40334	40364
Gray	46"	40305	40335	40365
Gray	48"	40306	40336	40366
Gray	50"	40307	40337	40367

ERG7490X: (CHEST SIZES 52' - 54")

COLOR	CHEST	30" INSEAM	32" INSEAM	34" INSEAM
Gray	52"	40308	40338	40368
Gray	54"	40309	40339	40369



17" Slush Overboots

- One piece molded rubber
- Adjustable snap



BOOTTRED - M-L-XL

TREDS I

Buckled Rubber Boots

- Over the shoe sizing
- 100% waterproof



BOOTBUCKLE

Rubber Boots

- Over the sock sizing
- Extra PVC on toe and heel



BOOTPVC

PERSONAL PROTECTION- FOOT WEAR/KNEES

Leather Kneepads • Padded LEATHER311 1/2"

• Weightless form- fitting foam BLAK401112009900



Foot Smart Technology Work Boots

Pull- On Loops

LEATHER314 1"

- Foot Smart Design
- Footbed Insulation
- Anatomic Support
- Support System
- Heel Reinforcement







Outback • Black Boots

Oil & acid slip resistant soles

REDBACKUABK

Easy Escape • Crazy Horse Brown

 Soles with multi directional lugs for traction on all surfaces



REDBACKUBCH

Great Barrier • Puma Brown

- Water resistant
- Oil & acid slip resistant soles



REDBACKUNPU

Easy Escape • Black

• Soles offers sure footing on any terrain, oil & acid slip resistant



REDBACKUBBK

Leather Preservative

 An easy apply natural beeswax based preservative



REDBACKLEATHERPRES



Insoles

 Shock absorbing insole distributes the stress of foot impact more evenly



REDBACKINSOLE

Shoe Covers

- One size fits all
- Disposable



SURSC300 -100 PAIRS SURSC3001PB -10 PAIRS



PERSONAL PROTECTION- KNEES

Hook & Loop Rubber Cap

 Slip resistant, grips wet or dry work surfaces, nylon cover



ERG335HL

Broad Cap Knee Protection

Lightweight gel and EVA foam for mobile comfort



ERG349

ERG345



Short Cap Knee Protection

100% injected gel and PU foam delivers lasting comfort







ERG355

ERG342

CLC375

Long Cap Knee Protection

10 mm gel and EVA foam for lightweight comfort







X Long Cap Knee Protection

• 100% injected gel and PU foam delivers lasting comfort







Gel-Tek™ Softcap™ Kneepads

 Padded layers of injected molded polyurethane and gel for total comfort





- Constitution of the cons

Gel-Tek™ Swivel Kneepads

 Padded layers of injected molded polyurethane and gel for total comfort



GC

Armor-Flex[™] Kneepads

 Durable PVC cap, closed cell foam with a side cut design for comfort and elastic straps



CLC339

CLC373



PERSONAL PROTECTION- HEAT STRESS

KNOW THE SIGNS AND KNOW THE MEASURES

Illness	Symptoms	First Aid
Heat stroke	Confusion Fainting Excessive sweating or red, hot, dry skin Very high body temperature	Call 911 While waiting for help: Place worker in shady, cool area Loosen clothing, remove outer clothing Fan air on worker; cold packs in armpits Wet worker with cool water; apply ice packs, cool compresses, or ice if available Provide fluids (preferably water) as soon as possible Stay with worker until help arrives
Heat exhaustion	Cool, Moist skin Heavy sweating Headache Nausea or vomiting Dizziness Light headiness Weakness Thirst Irritability Fast heart beat	Have worker sit or lie down in a cool, shady area Give worker plenty of water or other cool beverage to drink Cool worker with cold compresses/ice packs Take to clinic or emergency room for medical evaluation or treatment if signs or symptoms worsen or do not improve within 60 minutes Do not return to work that day
Heat cramps	Muscle spasms Pain Usually in abdomen, arms, or legs	Have worker rest shady, cool area Worker should drink water or other cool beverages Cool worker with cold Wait a few hours before allowing worker to return to strenuous work Have worker seek medical attention if cramps don't go away
Heat rash	Clusters of red bumps on skin Often appears on neck, upper chest, folds of skin	Try to work in cooler, less humid environment when possible Keep the affected area dry

* Remember, if you are not a medical professional, use this information as a guide only to help workers in need.

Cooling Towel

 Advanced PVA material holds water without feeling heavy



Evaporative Cooling Triangle Hat with Towel

• Lightweight and low profile



ERG6710CT - 12587 ERG6710CT - 12586 ERG6710CT - 12583





Hard Hat Neck Shade

Hook loop for easy attachment, stays hydrated up to 4 hours



ERG6670 - 12526 ERG6670 - 12525



Evaporative Cooling Bandana with Towel

• Lightweight and low profile, tie closure for personal fit



Cooling Bandana

Remains hydrated up to 4 hours



ERG6700 - 12303 ERG6700 - 12304

ERG6700 - 12307 ERG6700 - 12341







Hard Hat Neck Shade with Cooling Towel

Hook and loop suspension



ERG6670CT

PERSONAL PROTECTION- HEAT STRESS

High-Performance Dew Rag

 Fabric keeps moisture away, elastic band for secure fit



ERG6615 - 12477

ERG6615 - 12478

ERG6615 - 12485

Terry Sweatband

• Fits most hard hats



ERG6609

Straw Hats

Assorted sizes & styles



STRAWHATS

(Fredowt)

Evaporative Cooling Vest

 Lightweight, durable, washable stays hydrated up to 4 hours



ERG6665 -12533 ERG6665 -12534

EKU0000 -12004

ERG6665 -12535 ERG6665 -12536



Shax Umbrella

- Heavy duty commercial
- 84" diameter



E-ZUP Vista Canopy

- Includes: roller bag and spikes
- 10' x 10' & 12' x 12'



EZUPVS9104BL EZUPVS124BL



Shax Canopy

- Light Weight
- 10' x 10'



Shax Canopy

- Includes: rolling bag
- Heavy duty commercial grade
- 10' x 10'

 ERG6000

Tent Leg Weight Bags

Set of 2 bags



ERG6094



PERSONAL PROTECTION- HEAT STRESS

SunX SPF 30+ Sunscreen

50 Per box



SUNX91661



SunX SPF 30+ **Sunscreen Lotion**

4 Fl oz.



SUNX71664

Wide Mouth Water Bottle

- Easily fits ice cubes
- 33.8 oz.
- Dishwasher safe



ERG5151-13151 ERG5151-13152 ERG5151-13153



2 & 3 Gallon Coolers

- Stain and odor resistant
- Drip resistant spigot
- Extra thick insulation



RUBBER16831S - 3GAL



5 & 10 Gallon Cooler

Industrial Grade



RUBBER1685ST - 5GAL RUBBER16101S - 10GAL



4.5 oz. & 6 oz. Paper Cups

- 200 per box
- Designed specifically for Rubbermaid water coolers

4 oz. & 6 oz. **Paper Cup Dispenser**

- Designed for Rubbermaid
- Durable weather resistant



RUBBERFG825706WHT

Water Cooler Mount Rack

- Horizontal mounting
- Designed for Rubbermaid
- Durable weather resistant



RUBBERFG164002331

RUBBERFG163406BLWHT



PERSONAL PROTECTION- HEAT STRESS

Super STX Tough 54 Qt. Igloo Cooler

- Commercial grade
- Fully foamed lid for maximum cold retention
- Holds ice up to 4 days at 90° F



IGL0044946



Super STX Tough 150 Qt. Igloo Cooler

- Commercial grade
- Fully foamed lid for maximum cold retention
- Threaded drain plug that's hose compatible
- Holds ice up to 7 days at 90° F



IGL0044808



Super STX Tough 165 Qt. Igloo Cooler

- Commercial grade
- Fully foamed lid for maximum cold retention
- Threaded drain plug that's hose compatible
- Holds ice up to 7 days at 90° F





Premium Low Profile Hydration Pack

- Reflective accents for higher visibility
- Insulated pack & tube keeps water cool
- Wide mouth opening for easy cleaning



High Visibility Low Profile Hydration Pack

- For higher visibility
- Insulated pack & tube keeps water cool
- Wide mouth opening for easy cleaning



Premium Cargo Hydration Pack

- Reflective accents for higher visibility
- Insulated pack & tube keeps water cool
- Wide mouth opening for easy cleaning



URINE CHARGE OF YOUR OWN HYDRATION





You're barely human. Get your hydration on! Not bad, but you need more...keep drinking! BRAVO! Your hydration tank is full

YOUR BODY IS 60% WATER. REPLENISH IT.

Drink 128 oz. (3.78L)(minium) every 4 hours = 16×8 oz. (236mL) glass.

www.ergodyne.com

PERSONAL PROTECTION- HEAT STRESS

1 Gal Powder Concentrate

- Electrolyte replacement
- Assorted flavors



SQW016004-OR SQW016006-GR SQW016005-FP SQW016008-LL

Powder Concentrate

- Electrolyte replacement
- Assorted flavors

2.5 Gal



SQW016041-OR SQW016046-GR SQW016042-FP SQW016043-LL

2.5 Gal LITE **Powder Concentrate**

- Electrolyte replacement
- Assorted flavors



SQW016801-OR SQW016804-GR

SQW016803-FP SQW016800-LL



Qwik Stik Light Powder Concentrate

- Electrolyte replacement
- Makes 10 20 oz. bottles



SQW060200-OR SQW060204-GR SQW060202-FP SQW060205-LL

Sqwincher Sqweeze Pops

- Assorted flavors
- Electrolyte replacement
- Also available in sugar free



SQW159200201

Sqwincher Steady Shot

- 2 oz. shot
- Energy booster



SQW200500-OR SQW200501-FP



Electrolyte Chews

- Assorted flavors
- Electrolyte replacement



SQW010371-WB SQW010372-BC SQW010374-PL



1 Gal Bubba Keg Cooler



SQW600105



First Aid Kits

25 & 50 Person



OSHA Certified First Aid Kit

• 16-200 Person



FIRSTAIDOSHA



Metal Cabinet First Aid Kits

• 100 & 200 Person

FIRSTAID50



FIRSTAID100 FIRSTAID200

First Aid Refill Kits

• 100 & 200 Person



FIRSTAID100-FILLER FIRSTAID200-FILLER



Trauma Kit

- Portable kit use at the scene of an injury
- Meets ANSI standard Z308.1.2003



Survival Kit

• 72 hour



Burn Relief First Aid Kit

• 18 Person



Heat Stress First Aid Kit • 18 Person HEAT STRESS RESPONDER



Blood Borne Pathogen First Aid Kit • 10 Person FIRSTAIDBLOODBORNE

Eyewash Station

• 2- 32 oz. bottles



NOR127042

Honeywell

Eyewash Refill

HONEY32-000455-0000

• 32 oz.



Honeywell

Fendall Pure Flow 1000® Eyewash Station

- Easy installation, no plumbing required
- 15 minutes flush required by ANSI Z358.1
- 24 month cartridge life



HONEY32-001000-0000

Pure Flow 1000 Cartridge



Honevwell

HONEY32-001050-0000

ZOLL AED Plus Defibrillator

- The AED Plus is the only full-rescue AED, providing both CPR support and defibrillation.
- Indicates to rescuers whether a shock (defibrillation) or CPR is the appropriate therapy to initiate.
- Approximately 50% of SCA victims require defibrillation. All require CPR.

• Full-rescue AED that provides real-time auditory and visual feedback to help rescuers achieve the proper depth (2 inches) and rate of CPR chest compressions (100 per minute).

ZOLL


ZOLL22200010102011010









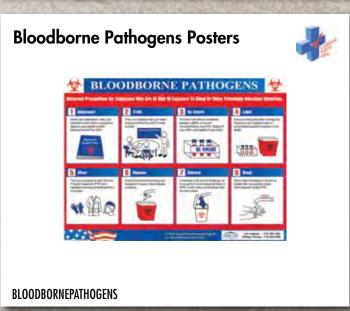





FALL PROTECTION- HARNESSES

TYPES OF HARNESSES



MULTI-PURSOSE HARNESS

This type typically incudes extra attachment points which allow work in a variety of situations. The belt and pad provide additional back lumbar support, positioning rings and tool carrying options.



WORK POSITIONING HARNESS

These harnesses have positioning D-rings located on the hips for use with pole straps or work positioning lanyards, which allow hands-free operation. Harnesses of this kind may include integral waist belts.



LADDER CLIMBING HARNESS

Harnesses with a frontal attachment point, for connection to permanent ladder safety systems.




DESCENT CONTROL HARNESS

These harnesses typically have frontal attachment points for use with descent control devices.




CONFINED/RETRIEVAL HARNESS

One attachment point located on each shoulder strap facilitates upright retrieval from confined spaces.

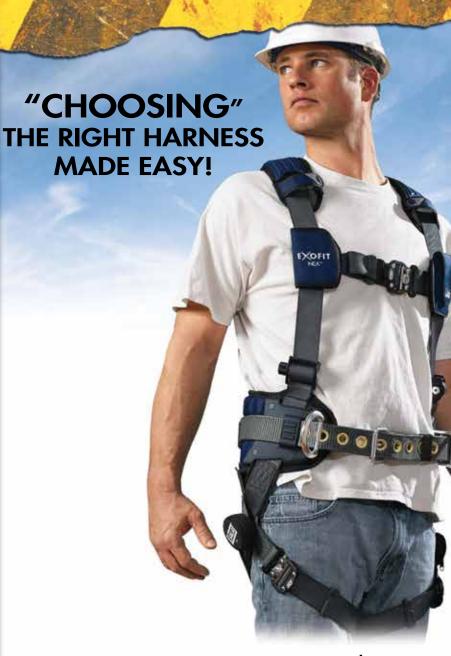

ExoFit NEX[™], ExoFit[™] XP ExoFit[™] & Delta[™] FULL BODY HARNESS SIZING CHART

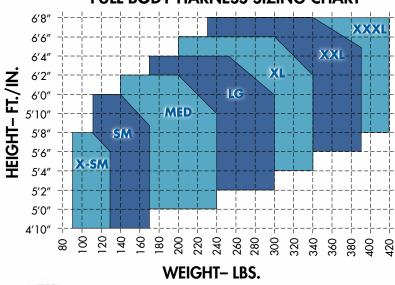

Harness EXOFIT NEX™ Construction Style

 Aluminum back & side D-rings, sewn in hip pad/belt



DB11113121 - S DB11113124 - M DB11113127 - L DB11113130 - XL



Harness EXOFIT NEX™ Vest Style

Aluminum back D-ring







SALA

Harness EXOFIT NEX™ Vest Style

 Aluminum vertical D-ring on chest strap and back D-rings









EXOFIT™ harnesses have a reputation for maximum comfort, freedom of movement and ease-of-use, as well as launching innovations such as the spring-loaded, stand-up back D-ring, and the Revolver™ torso adjusters.

- Revolver[™] Vertical Torso Adjusters
- Hybrid Comfort Padding
- Tech-Lite[™] Aluminum D-Rings
- Integrated Trauma Straps
- Duo-Lok™ Quick Connect Buckles
- Ultra-Soft Edging
- Protective Shoulder Caps
- Molded Lanyard Keepers
- Reflective Material
- Built-In Carrying Pocket
- Repel technology Webbing
- Stand-Up Dorsal D-Ring
- Comfort
- Function
- Durability

Harness EXOFIT NEX™ Cross Over Style

 Aluminum front and back D-rings









FALL PROTECTION- HARNESSES

Harness EXOFIT™ XP **Vest Style**

• Back D-ring, seat straps, quick connect buckles



DBI1110100 - S DBI1110101 - M DBI11110102 - L DBI1110103 - XL

SALA

Harness EXOFIT™ XP **Vest Style**

Front, back and side D-rings



DBI1109751 - M DBI1109752 - L

DBI1109753 - XL

Harness EXOFIT™ XP **Cross Over Style**

 Front, back and side D-rings with seat straps



DBI1110350 - S DBI1110351 - M DBI1110352 - L

DBI1110353 - XL

SALA

SALA

Harness EXOFIT™ XP **Construction Style**

• Front, back and side D-rings, sewn in hip pad/belt, removable seat sling



Harness EXOFIT™ Vest Style

 Back D-ring, tongue buckle legs



DBI1109356 - M

DBI1109357 - L

DBI1109358 - XL

Harness EXOFIT™ **Vest Style**

 Back D-ring, quick connect buckles



DBI1107975 - S DBI1107976 - M DBI1107977 - L

DBI1107981 - XL



SALA

SALA

Delta™ Vest Style Harness **Tongue Buckles**

Back D-ring



Delta[™] Vest Style Harness **Quick Connect Buckles**

Back D-ring



DBI1110600 - UNIVERSAL SIZE

Delta[™] Vest Style Harness Pass Thru Buckles Back D-ring



Delta[™] Vest Style Harness Pass Thru Buckles

Back and side D-rings

DBI1102000 - UNIVERSAL SIZE



Delta[™] Vest Style Harness **Tongue Buckles**

Back and side D-rings



DBI1102008 - UNIVERSAL SIZE

Delta™ Vest Style Harness **Quick Connect Buckles**

Back and side D-rings



DBI1110625 - UNIVERSAL SIZE

Delta[™] Harness **Tongue Buckles**

 Back and side D-rings, belt, with sewn in hip & shoulder pads



Delta[™] Harness **Quick Connect Buckles**

 Vest style, back and side D-rings with sewn in hip & shoulder pads





FALL PROTECTION- HARNESSES

Pro™ Harness Vest Style

 Back D-rings, pass through buckle legs



DBI1191200 - S DBI1191201 - MED/LRG DBI1191202 - XL



Pro™ Harness Vest Style With Comfort Padding

• Back D-rings, quick connect buckle legs



Pro™ Harness Vest Style

 Back and side D-rings, tongue buckle legs



DBI1191245 - S DBI1191246 - MED/LRG DBI1191247 - XL

Pro[™] Welders Harness

- Back D-ring, pass through chest connection
- Resist char splatter up to 700° F



DBI1191385 - MED/LRG DBI1191386 - XL



DBI1191208 - S DBI1191209 - M DBI1191210 - XL

Pro™ Harness Construction Style

DBI1191254 - XL

Back D-rings, with side D-rings, tongue buckle legs, belt with hip & shoulder pads






Pro™ Harness Vest Style

 Back and side D-rings, pass through buckle legs



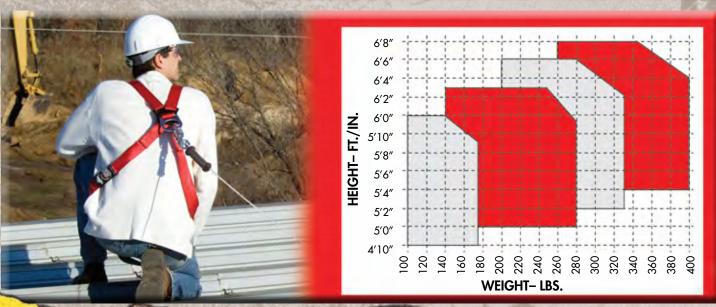

COMFORTECH Belted Full Body Harness

- 3 D rings, back & side
- Tongue buckle legs & mating buckle chest, lumbar waist pad



HIGH-VIS Vest Full Body Harness

- 3 D rings, back & side
- Tongue buckle legs and mating buckle chest



FALL7018SML - S/M FALL7018LXL — L/XL FALL70182X3XL -2LX/3XL

FALLTECH

Contractor Standard Full Body Harness

 1 back D-ring, mating buckle legs and chest



FALL7015 - UNI FALL7015XL - XL FALL70152X -2XL FALL70153X -3XL

Contractor Standard Full Body Harness

• 1 back D-ring, tongue buckle legs & mating buckle chest



FALL7016 - UNI FALL7016X/2X - XL/XXL

FALL70163X -3XL

Contractor Standard Full Body Harness

- 3 D rings, back & side
- mating buckle chest



FALL70182X -2XL

Tongue buckle legs and

FLOWTECH Belted Full Body Harness

FALL7089S - S

- 3 D rings, back & side
- Quick connect legs & chest
- FlowScape® Shoulder, leg & waist pads



FLOWTECH Standard Full Body Harness

1 back D ring

FALL7087S — S

FALL7087M - M

FALL7087L – L

- Quick connect legs & chest
- FlowScape® Shoulder, leg & waist pads



FALL7018 - UNI FALL7018XL - XL

FALL70183X -3XL

FALL PROTECTION- HARNESSES/ACCESSORIES

Roofer's Kit

 Includes: Harness. vertical lifeline, shock absorbing lanyard with manual grab & roof anchor



Compliance in a Can

 Includes: Harness, 50' life line, bucket, reusable roof anchor, rope grab



FALL8593A

Roofer's Fall Protection Kit

• Includes: Reusable roof anchor full body harness, rope adjuster, lanyard, lifeline, counterweight & carrying bag



Suspension Trauma Safety Straps

 One pair, connects to most harnesses

DBI2199803

DBI9501403



SALA

15 - Pocket **Construction Pouch**



11 - Pocket **Construction Pouch**



DBI9504066

Cell Phone Holder

• 4-1/2" x 2-1/2" x 1/2"



DBI9501264

SALA

Personal Radio Sleeve

Carrying holster



Shock Absorber

 D-ring at one end, snap hook at other DBI1340260

D - Ring Extension

 D-ring at one end, snap hook at other



Tape Trap

- 12 ft. & 30 ft. rolls
- Cut & puncture resistant
- Use with 3700, 3703, 3713 3713EXT Tool Tails



Tool Trap – Cold Shrink

- Available in 3 sizes
- Fits tool diameters from 0.75" to 2.5"
- Cold shrink technology from 3M requires no heat source
- Uses with 3703 or 3713 Tool Tails

Weight Ratings 3'' - 5 lbs. 4'' - 10 lbs.

ERG3723 -3" ERG3724 -4" ERG3726 -6"

6'' - 15 lbs.





Retractable Tool Lanyard

Locks into place

ERG3705M - 30 ft.

- Set lanyard length up to 48"
- Technora cord for strength



Retractable Accessory 3 Pack/Carabiner

- Quick connecting buckles
- Stainless steel carabiners



Retractable Accessory 3 Pack/Elastic Loop

- Quick connecting buckles
- Adjustable barrel lock



Tool Lanyard Detachable

- Single carabiner
- Makes tool switchouts faster



Detachable Lanyard Loops

- Quick connect buckle
- Comes in packs of 3



Buckle Hard Hat Lanyard

 Double lock buckle attaches to fall protection



ERG3150

Tool Lanyard

 Stretch cord surrounded by tubular nylon webbing & aluminum carabiner



Tool Lanyard Double Carabiner

 Stretch cord surrounded by tubular nylon webbing & aluminum carabiners



Tool Lanyard Carabiner Style

- Triple action with swivel
- Adjustable barrel lock
- Aluminum carabiner



ERG3109

Elastic Tool Tails

- Chokes onto tool for secure connection
- Durable construction



Coil Tool Lanyard

- Spiraled cable design
- Vinyl covered aircraft cable
- Available in small or medium



Wrist Tool Lanyard

- Tether length 7-1/2"
- Adjustable barrel lock
- Available in S/M or L/XL



Power Tool Trap

ERG3713 -18"


- Fits most power tool batteries
- D-ring for tool lanyard attachment, two hook & loop straps for easy tethering



Pull On Wrist Lanyard

Carabiner or buckle

Maximum working capacity 3 lbs.





ERG3114 - Carabiner ERG3116 - Buckle



CARABINER

MODEL




Tether Ready Tape Measure • 1" x 25' Inch/metric scale **Snap-on.** Industrial Brands WILSOTTHTPMA25EM

WILWSC-116-TH — 115 Pieces Total WIL50950 — Tool Box Only





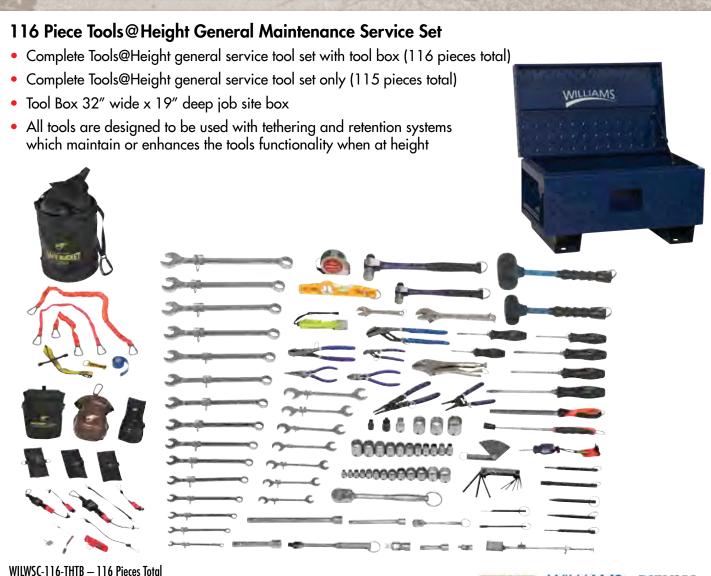


WILLIAMS


Snap-277. INDUSTRIAL BRANDS

Heavy-Duty Nylon Bucket

- 840D nylon main material
- Web handle with D-ring connection on top, 2 anchoring D-rings on rim of bucket









Heavy-Duty Canvas Bucket

- 20-ounce canvas
- Web handle with D-ring connection on top, 2 anchoring D-rings on rim of bucket

Available with or without top



Interior pocket



ERG5760 ERG5760T



Large Plastic Bottom Canvas Bucket


• 18-ounce Canvas

ERG5650

ERG5650T

- PP weather resistant rope handle
- Available with or without swivel snap
- Available with or without top







ERG5733 ERG57331





Swivel Snap ERG5743 ERG5743T



Small Plastic Bottom Canvas Bucket

- 18-ounce Canvas
- PP weather resistant rope handle
- Available with or without swivel snap
- Available with or without top
- Two interior pocket




ERG5734 ERG5734T

Swivel Snap ERG5744 ERG5744T



Heavy-Duty Nylon Bucket

- 840D nylon main material
- Web handle with D-ring connection on top, 2 anchoring D-rings on rim of bucket
- Available with or without top
- Molded plastic base and top ring





Heavy-Duty Canvas Bucket

- 18-ounce canvas
- Web handle with D-ring connection on top,
 2 anchoring D-rings on rim of bucket
- Available with or without top
- Molded plastic base and top ring
- Interior pocket



Leather Bottom Canvas Bucket

- 20-ounce Canvas
- PP weather resistant rope handle
- Available with or without swivel snap

Available with or without top

Interior pocket



16"D x 20"H ERG5735 ERG5735T Swivel Snap

ERG5745 ERG5745T



12.5"D x 17"H ERG5730 ERG5730T Swivel Snap ERG5740 ERG5740T



Bucket Safety Top

- 18-ounce canvas or 840D nylon covers
- Easy on, easy off
- Best in class YKK buckles





FALL PROTECTION- LANYARDS

ELASTECH 100% Tie Off Elastic Lanyard

- Expanding Y-leg, 1 snap hook & 2 rebar hooks
- D-ring for SRL attachment



PRO™ Elastic Shock Absorbing Lanyard

• Single-leg with snap hooks at each end x 6 ft.



DBI1341101

PRO™ Elastic Shock 100% Tie Off Shock Absorbing Lanyard

 Double-leg with snap hook & flat steel rebar hooks at leg ends x 6 ft.



DBI1342125

PRO™ Stretch Shock **Absorbing Lanyard**

 Single-leg with snap hooks at each end x 6 ft.



DBI1340101



PRO™ Stretch Shock 100% Tie Off Shock Absorbing Lanyard

 Double-leg with snap hook & flat steel rebar hooks at lea ends x 6 ft.



Shockwave[™]2 Lanyard

• Single-leg with snap hooks at each end x 6 ft.



DBI1244306



Shockwave[™]2 Lanyard

 Single-leg with snap hooks & steel rebar hook x 6 ft.



DBI1244321

SALA

Shockwave[™]2 100% Tie-Off Lanyard

 Double-leg with snap hook & aluminum rebar hooks on leg ends x 6 ft.



DBI1244409

Shockwave[™]2 **Tie-Back Lanyard**

Single-leg with snap hook & 5,000 lb. tie-back carabiner x 6 ft.



DBI1244650

SALA

SALA

Shockwave[™]2 100% Tie-Off Tie-Back Lanyard

 Double-leg with snap hook & 5,000 lb. tie-back carabiner at leg ends x 6 ft.



DBI1244675

EZ-Stop™ II Lanyard

 Elastic leg, 1" web, snap hooks at ends x 6 ft.



DBI1240906

EZ-Stop™ II Cable Lanyard

 Single leg, 7/32" vinyl covered cable & snap hooks x 6 ft.



DBI1240706

SALA

SALA

SALA

Force2[™] Lanyard

 Single leg snap hooks at each end x 6 ft.



DBI1245006

SALA

SALA

Wrapbax[™] 2 Tie Back Lanyard

 Single leg with snap hook & 5,000 lb. hook x 6 ft.



DBI1246229

Wrapbax[™] 2 Tie Back Lanyard

 Double leg with snap hook & 5,000 lb. hooks x 6 ft.



DBI1246080

SALA

PRO™ Shock Absorbing Lanyard

 Single leg with self locking snap hooks at each end x 6 ft.



DBI1340220

PRO[™] Tie Back 100% Tie Off Shock Absorbing Lanyard

 Double leg, 5K carabiners at leg ends for tie back & snap hook x 6 ft.



DBI1340060

PRO[™] 100% Tie Off Shock Absorbing Lanyard

 Double leg, snap hook, flat steel rebar hooks at leg end x 6 ft.



DBI1340180



SOLUTION FOR THE EDGE

SELECTION GUIDE

NANO-LOK*

	Lifeline Hook								SRL
	A. Tie-Back	B. Alum. Rebar Lock Hook	C. Steel Rebar Lock Hook	D. Alum. Rebar Hook	E. Steel Snap Hook	F. Steel Swivel Snap Hook	G. Alum. Captive Carabiner	H. Alum. Snap Hook	U.S PART NUMBER
100% Tie-Off									3500228
									3500231
									3500227
									3500249
									3500225
									3500226
									3500229
									3500230
Single									3500213
		•							3500216
			-						3500212
									3500247
									3500210
									3500211
									3500214
									3500215

- A INTEGRATED, BACKPACK-STYLE ENERGY ABSORBER
- **B** EASY-TO-INSTALL CONNECTOR
- **C** GLOBAL SHARP EDGE ICON
- D TOUGH AND FLEXIBLE GALVANIZED CABLE LIFETIME
- **E** IMPACT-RESISTANT HOUSING
- F HOOK OPTIONS



FALL PROTECTION-LIFELINES

Nano – Lok™ Lifeline Self Retracting Double Leg

Aluminum carabiners



Nano – Lok™ Lifeline Self Retracting Double Leg

Aluminum rebar hooks



DBI3101277

SALA

Nano – Lok™ Lifeline Self Retracting Single Leg

• 420 lb. weight capacity

DBI3101275

DBI3101225



SALA

Talon™ Quick Connect Self Retracting Lifeline

 Web SRL with quick connector and swiveling hook x 8 ft.



DBI3101001

SALA

Talon™ Twin Leg Self Retracting Lifeline

• SRL twin 6' web, 100% tie off ends



DBI3102000

Talon™ Tie Back

 Twin leg SRL's include Delta pad and 2 lanyard keepers



DBI3102100



SALA

FALL PROTECTION-LIFELINES

Rebel[™] Self Retracting Lifeline

• Galvanized cable, swivel hook, and snaphook end with thermoplastic housing



DB13590550 - 50'DBI3590500 - 33'

Rebel[™] 6 Ft. Self Retracting Lifeline

 Webbing, swiveling anchorage, and snaphook end



DBI3101483



Rebel[™] 6 Ft. Self Retracting Lifeline

• Webbing, carabiner and snaphook end



DBI3101116

Rebel[™] 11 Ft. Self Retracting Lifeline Webbing and snaphook end



DBIAD111B



Rebel[™] 15 Ft. Self Retracting Lifeline

• Galvanized cable, carabiner and snaphook end



DBIAD115B



Rebel[™] 20 Ft. Self Retracting Lifeline

Webbing, swiveling anchorage, carabiner and snaphook end



DBIAD120AR



DuraTech Self-Retracting Web SRD

 Power of a full sized unit without the added weight

 Steel carabiner with captive pin & steel snap hook



FALL82706SB1 - 6FT FALL82710SC1 - 10FT

Swivel Eye Connectors Options

All Connectors Comply With ANSI Z359.12 - 2009



Steel Carabiner



Aluminum Carabiner

DuraTech 6' Twin Compact Web SRD

Smallest SRD on the market with inertial brake mechanism

Carabiner with alignment clip and steel snap hook leg-end connectors



Leg-End Connectors Options

All Connectors Comply With ANSI Z359.12 - 2009



Steel **Snap Hook**



Steel Rebar Hook



Aluminum Snap Hook



Aluminum Rebar Hook



4 Person Temporary Horizontal Lifeline Kit

• Includes: 75 ft. synthetic rope, line tensioner, 4 O-rings, 2 carabiners, 2 pass through anchors with storage bag



FALL777075



PRO™ Horizontal Lifeline System

 Complete kit includes two tie-off adaptors, 60 ft. web lifeline & carrying bag



DBI1200101

FALL PROTECTION-LIFELINES

Rope Grab Kit

 Includes rope grab, lanyard, lifeline, counterweight, tie-off adaptor & carrying bag



Lad-Saf™ X2 Cable Sleeve

- Use with 3 / 8 " and 5 / 16 " galvanized & stainless steel
- Locks into place immediately



DB15000400

Large Eye Rope Grab

- Use on 5/8" nylon rope lifeline
- Auto/Manual



DBIAC202D

Rope Adjuster/Lanyard

- Use 5/8" polyester polypropylene rope lifeline
- Manual use



DBI1340005



Sealed-Blok™RSQ™ Dual – Mode Built in Rescue Operation

• 2 modes of operation, fall arrest mode, automatic descent mode



DBI3400930

EZ-Line™ Retractable Horizontal Lifeline System

• Built in winch, pre tension & impact indicators



DBI7605060

SALA

SALA

FALL PROTECTION-LIFELINES

Cynch – Lok™ for Distribution Poles

• Pole size min 5.5"/17.5" max 16"/50", weight 4.5 lbs.



Rebar Positioning Lanyard

• Swivel steel rebar hook with 2.5" gate opening, clevis-pin steel snap hooks & grade 80 chain



Chain Rebar Lanyard

DBI1204057

• Assembly with snap hooks & aluminum rebar hook at center x 20.5"



Chain Rebar Assembly

SALA

• Swivel chain rebar assembly with snap hooks & flat steel rebar hook at center x 24"



Saflok™ 2-3/16" Carabiner

Steel, self locking/closing 3,600 lb. gate



DBI2000114

Saflok™ 11/16 " Carabiner

Steel, self locking/closing 3,600 lb. gate



DBI2000112



SALA

FALL PROTECTION- ADAPTORS

First[™] 5/8" Rope Grab

- 2" shock absorbing lanyard
 2 snaphook ends
- Bag included



Lifeline-Nylon

 5/8" nylon rope with 2 snaphook ends



DBIAC210A2 — 25FT DBIAC215A2 —50FT

PROTECTA

50 Ft. Lifeline-Blend Rope

• 5/8" nylon rope, carabiner at one end and tape at other



DBIAC27352



Safline[™] Cable Lifeline

- Durable all metal system
- 2 worker capacity
- Portable



DB17602020 DB17602050 DB17602080 DB17602100



Cable Tie Off Adaptor

- 1/4" coated galvanized cable
- 6 ft. with snap hook at one end & O-ring at the other



DBIAJ408AG

Cable Tie Off Adaptor

- 1/4" coated galvanized cable
- 6 ft. with two O-rings



DBIAJ47406



Suspended Cable Anchor

- Temporary, reusable drop- through anchor for overhead attachment
- High strength 1/4" galvanized cable



Hand Grip

DBIAJ301A - 2"

DBIAJ302A - 3"

DBIAJ303A - 4"

 2" Capacity, One Hand Operation with plastic grips



Web Anchor

Strap with large opening hook
 D-ring at other end x 1.5 ft.



DBI1231305



Web Scaffold Choker

- Choker style attaches to 3" diameter anchorage
- 1" polyester strength x 17"



Web Tie- Off Adaptor

- Pass through design 1-3/4" polyester strength
- Available in 3 ft. and 6 ft.



Web Tie-Off Adaptor

Web loop and D-ring pass thru



DBIAJ47410



Concrete Anchor Strap

 Disposable 1-3/4" polyester construction x 3-1/2 ft.



Two-Way Universal Standing Seam Clamp All steel construction rev

- All steel construction, reusable
- Reversible design allows seams up to 1" wide



BMR Trolly Anchor

- Combo use with shock absorbing lanyard or a SRL
- Safety locking toggles allows easy adjustment, eliminates risk
- Free moving rollers



Deluxe Rotating SRD Anchor

 Provides additional connection D-ring for attachment of alternate systems



Concrete Anchor Point

- "Ace" concrete anchor point
- Ideal for permanent use
- Fall resistant/ positioning usage
- Easy to install and inexpensive



GUARD15040

GUARDIAN

Concrete Anchor Point

- Anchor bracket with integral D-ring
- Universal bushing
- Large washer



TYPES OF ANCHORS

The choice of anchor depends on the type of work. Anchorages are defined by what they connect to (general/all purpose, steel, concrete, roof or specialty), whether they are fixed or mobile, and whether they are permanent or portable. They all must provide a secure point of attachment for a complete personal fall arrest system, and must be capable of supporting a load of 5,000 lbs. or meeting OSHA's criteria of a 2-to-1 safety factor.



Toggle Anchor

 Swiveling D-ring provides a compatible tie off point



DBI2100101

Concrete D-Ring Anchor

 Reusable for temporary or permanent applications



DBI2104560

Concrete D-Ring Anchor

Reusable



DBI2190055



Concrete Wedge Anchor

Exclusive quick release button for fast removal



Concrete Wedge Anchor

 Portable, anchor for vertical wall or overhead ceiling



Concrete Swivel Anchor

- Correct installation indicator
- Rotates increasing mobility
- Temp/permanent applications



GUARD00242

FALL PROTECTION- ANCHORS

Fixed Beam Anchor

Fits up to 1-1/2" thick beam flange, 2-1/2" to 12" wide



DBI2108406

SALA

Glyder™ Sliding **Beam Anchor**

• Dual beam grip adjustment fits 3-1/2" -14" wide flange up to 1-1/4" thickness



SALA

DBI2104700

Parapet Anchor

- Temporary fall arrest anchorage
- No fasteners required
- Fits Parapet Walls 1/2" to 15" thick



Adjustable Skyhook

- Fits from flat -12/12" roof pitch
- Easy attachment and movement
- 360° swivel D-ring
- Weatherproof



GUARD00342



Portable Roof Anchor

 Reusable on flat or sloped wood roofs



DBI2103673

Permanent Roof Anchor

 Shingle over leaving only D-ring exposed



Permanent Ridge-It Anchor

- Easy to install, exposing 2 D-rings for attachment
- Permanent on wood roof top
- Water tight protection



GUARD00511

Portable Roof Anchor

 Compact design, reusable on flat or sloped wood roofs



DBI2103677

EcoAnchor Roof Anchor

• 4' x 4' water filled counterweight anchor with duffle bag



FALL7433

FALLTECH

FALL PROTECTION- HOIST SYSTEMS



ADVANCED HOIST SYSTEMS

These units are constructed of lightweight materials including high-strength aluminum. The davit pivots for ease-of-rescue and has adjustment for overhead clearance restrictions. The lower base adjusts to fit most standard entries.

Advanced 5 Piece Hoist System

- Davit arm base system is 11-1/2" to 27-1/2"
- Adjustable offset upper mast, 33" lightweight lower mast and 3-peice lightweight base.
- Includes: winch mounting bracket
- Weight: 100 lbs.

Order winch and SRL separately

RSQ[™] Dual – Mode Built in Rescue Operation

 2 modes of operation, fall arrest mode, automatic descent mode

DBI3400930

Rescue Ladder

- Available in 8ft. Sections
- Includes 3 carabiners for attachment



DB18516294



SALA

FALL PROTECTION- HOIST SYSTEMS/ NETTING

Perimeter Limiter Leading Edge Anchor

- Large foam filled trailer tire won't go flat and will provide easy movement
- Rotating 7.5 ft. mast and anchorage arm for added freedom of movement
- Pre-drilled holes for accessory rescue winches or jobsite boxes
- Additional weights and taller mast can be added for jobsite flexibility





Freestanding, non penetrating anchor is ideal for concrete decking construction and provides overhead anchorages for up to 2 users



Construction Safety Netting

- Fire retardant debris netting
- Polyethylene
- UV resistant

Construction Safety Netting

- Fire retardant 70 pro knit mm
- Polyethylene
- UV resistant

Functions as a guardrail system while blocking materials from falling



48" Available in Black and Blue

GUARD70001-48" GUARD70004-60" GUARD70005-66" GUARD70009-102"



GUARD70007-48" GUARD70008-66" GUARD70009-102" GUARD70010-180"

Skylight Protection System

- High strength polypropylene
- Ratchet made of galvanized steel



GUARD70024 - 80" x 80" GUARD70025 - 10' x 10'

Netting Plate



GUARD70014

Netting Clip



GUARD70015



FALL PROTECTION- GUARDRAIL SYSTEMS

California Code of Regulations Title 8. Section §3209. Standard Guardrails Subchapter 7. General Industry Safety Orders Group 1. General Physical Conditions and Structures Orders Article 2. Standard Specifications

Wherever guardrail protection is required, the following standards shall be adhered to except that other types and arrangements of guardrail construction will be acceptable where the height, surface and end projection of the top rail complies with the standard specifications and the closure of the vertical area between the top rail and floor, platform, runway, or ramp provides protection at least equivalent to that afforded by a mid-rail.

(a) A standard guardrail shall consist of top rail, mid rail or equivalent protection, and posts, and shall have a vertical height within the range of 42 inches to 45 inches from the upper surface of the top rail to the floor, platform, runway, or ramp level. (Note: the permissible tolerance on height dimensions is one inch). The top rail shall be smooth-surfaced throughout the length of the railing. The mid rail shall be approximately halfway between the top rail and the floor, platform, runway, or ramp. The ends of the rails shall not overhang the terminal posts, except where such overhang does not constitute a projection hazard. (Title 24, Part 2, Section 2-1716(a)).

Note: Local building regulations may require 9-inch spacing of mid rails.

(b) All guardrails and other permissible types, including their connections and anchorage, shall be designed for a live load of 20 pounds per linear foot applied either horizontally or vertically downward at the top rail. Dimensional details of railing members of a few types of construction which comply with this strength requirement are given hereinafter in subsection (c).

Note: It is recognized that the minimum value of railing strength here specified is inadequate for safety under operating conditions where railings are liable to receive heavy stresses from crowds, trucking, handling materials, etc. For such conditions, additional strength shall be provided by use of heavier stock, closer spacing of posts, bracing, or otherwise.

Railing members shall be framed in such a position that they will afford the greatest support and protection, for example, top rails of structural steel angles shall have the outside face of vertical leg located on the side adjacent to the side of normal contact by the employee. (Title 24, Part 2, Section 2-1716(b).)

- (c) The following are some acceptable guardrail specifications: other combinations will be accepted as long as equivalent strength and protection are maintained.
- (1) In wooden construction, the posts to be of at least 2-inch by 4-inch nominal material spaced not to exceed 6 feet, the top rails to be smooth with corners rounded and not less than 2-inch by 4-inch nominal material. The posts may be spaced on 8-foot centers if the top rails consist of double 1-inch by 4-inch nominal boards, provided that 1 board is fastened in a flat position on top of the posts and the other is fastened in an edge-up position to the inside of the posts and the side of the top board. Single mid rails, where permitted, shall be not less than 2-inch by 4-inch nominal material and installed on the contact side of the guardrail.
- (2) If constructed of standard metal pipe, the top rails and single mid rail, where permitted, to be 1 1/2-inch outside diameter or larger. The posts to be 1 1/2-inch outside diameter or larger, the spacing not to exceed 8 feet.
- (3) Guardrails installed on or before May 26, 2011. If constructed of structural metal, the top rails to be angle iron of at least 2-inch by 2-inch by 1/4-inch angles or other metal shapes of equivalent bending strength; and the single mid rail, where permitted, to be iron or steel of at least 2-inch by 2-inch by 1/4-inch angles or other metal shapes of equivalent strength. The posts to be angle iron of at least 2-inch by 2-inch by 1/4-inch stock, the spacing not to exceed 8 feet.
- (4) Guardrails installed after May 26, 2011. If constructed of structural metal, the top rails to be angle iron of at least 2-inch by 2-inch by 3/8-inch angles or other metal shapes of equivalent bending strength; and the single mid rail, where permitted, to be iron or steel of at least 2-inch by 2-inch by 3/8-inch angles or other metal shapes of equivalent strength. The posts to be angle iron of at least 2-inch by 2-inch by 3/8-inch stock, the spacing not to exceed 8 feet.
- (d) Where toe boards are required, they shall be constructed of wood, concrete, metal, or other suitable material. Where constructed of metal grille, mesh shall not exceed 1-inch. The top of the toe board shall be not less than 3 1/2 inches above the platform, walkway, or other working level and the bottom clearance shall not exceed 1/4-inch.

Note: Where materials are piled, higher toe boards, or paneling from floor to intermediate rails or top rail shall be provided where necessary for safety. (Title 24, Part 2, Section 2-1753.)

Note: Authority cited: Section 142.3, Labor Code. Reference: Section 142.3, Labor Code; and Section 18943(c), Health and Safety Code.



FALL PROTECTION- GUARDRAIL SYSTEMS

Safety Boot® Guardrail System

 Design that allows toe boards to be inserted quick and easy



SAFETYBOOT



SurShield® Clamping Guardrail System

No drilling

 Includes Safety Boot unit



VersiShield® Clamping Guardrail System

 Swivels into place on odd angles

 Locks securely onto the edge

VERSISHIELD











Safety Boot® Tall Guardrail Brace

 Provides protection up to 65 inches

 Must use with Safety Boot





ParaShield™ Clamp Guardrail System

 For vertical wall structures ranging from 4" to 10" in width





 Easily adjustable and fits various size of stringers



STRINGERSHIELD







FALL PROTECTION- GUARDRAIL SYSTEMS

Guardrail Base

 Galvanized base assembly for guardrail system (70 lbs.)



Guardrail Splice Kit


 Allows user to connect customized shortened rail sections together



SALA

Portable Guardrail System

• Free standing system eliminates surface penetration



Guardrail Gate


DBI7900063 - 10 ft.

- Steel swing gate
- Adjustable from 23"-38"



Portable Construction Guardrail Stanchion

- Mounts in both parapet and edge grab configurations for jobsite versatility
- Rapid clamping system expands from 6"-24"
- Supports both top and mid rail guardrails, and toe boards when used in edge grab configuration

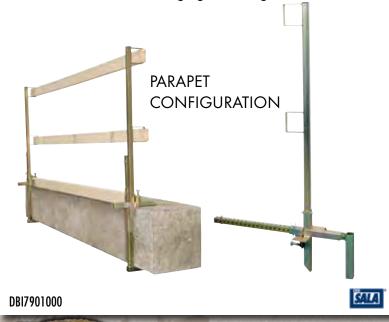

SALA

FALL PROTECTION- GUARDRAIL SYSTEMS

COLLAPSIBLE GUARDRAIL SYSTEM

"The ultimate free standing, portable fall prevention system that does not require a rooftop surface attachment."

Collapsible Guardrail Adapter

 Safety locking pin allows for secure & easy attachment

,

Guardrail

• 42" x 10'

GUARD15172



- Multi directional base plate
- Skid resistant bases



GUARD15181



GOOSE WARNING LINE SYSTEM Creates a barrier to provide protection and limit access of fall hazards

Goose Single Stanchion

- Easy to connect stem system on top
- Spring loaded legs

GUARD15227

No additional tools required

Goose Transporter

- Holds nine stanchions
- Steel construction



GUARD15228

Replacement Flag Line

- 105 ft.
- Flags spaced out every 2 feet
- Heavy duty nylon cord



FALL PROTECTION-LADDER ACCESSORIES

2-Rung Ladder Jack

- Easy to install and remove
- Pair with ladder jack to support planking up to 18"



3-Rung Ladder Jack

- Easy to install and remove
- Pair with ladder jack to support planking up to 18"



Corner Buddy Ladder Stabilizer

- Provides additional stability
- Supports on multiple dimensional surfaces
- Connects to nearly any ladder



GUARD2470



Ladder Rung Step

- Reduces worker fatigue by providing extra support
- Provides more stability
- Easy, no tool required installation



GUARDIAN

Safe-T Ladder Extension

 Attaches over the top of the ladder to provide a safe and easy transition from the ladder to a second surface



GUARDIAN

GUARD2477

Lock n Climb

GUARD2460 -16' to 20'

GUARD2465 - 24' to 40'

- Provides additional stability and weight capacity
- Compatible with any ladder extension 16-40'
- Withstands loads excess of OSHA and ANSI A14.2 and A15.5



GUARDIAN

Ladder Hook

GUARD10800

- Provides an ideal method of securing top of ladder to roof top
- Holds ladder firmly in place for better safety
- Fits single or extension ladders, adjusting to fit between top 2 rungs



GUARDIAN

GUARD2480

FALL PROTECTION-LADDERS


Fiberglass Extension Ladder

- 300 lbs. capacity
- Quicklatch rung lock



Fiberglass Extension Ladder

- 300 lbs. capacity
- Quicklatch rung lock





A Frame Fiberglass Ladder

- 300 lbs. capacity
- SHOX[™] bracing

Double step



A Frame Fiberglass Ladder

- 375 lbs. capacity
- SHOX™ bracing
- Double step

LOUFE3236 - 36ft

LOUFE3240 - 40ft





A Frame Fiberglass Ladder

- 300 lbs. capacity
- SHOX[™] bracing

ProTop[™]



A Frame Fiberglass Ladder

- 375 lbs. capacity
- SHOX[™] bracing

ProTop[™]





LOUFS1508 - 8ft

LOUFS1510 - 10ft

LOUFS1512 - 12ft

FALL PROTECTION-LADDERS





SOLUTIONS TO: FACING YOUR WORK



Sumo Stance Ladder

- Type 1AA
- Adjust 9" on each side over uneven ground
- Built in levels

• 375 lbs. capacity



SUMMSTANCE LW

FALL PROTECTION-LADDERS

Compact Cage Ladder

- Type 1AA
- Adjusts in one foot increments

• Safe over uneven surfaces

• 375 lbs. capacity



Conquest Ladder

- Type 1A
- Versatile ladder for varying situations
- Wide rungs

• 300 lbs. capacity



LITTLEG15144 **7' - 15'**

CONQUEST

Select Step Fiberglass Ladder

Type 1AA

LITTLEG18508-146 5' - 8'

LITTLEG18506-146 6' - 10'

• Comfort step & wide rungs

One ladder multiple sizes

LITTLEG15131 6' - 10'



- 4 Step Safety Step Ladder
- Tip & glide wheels
- Folds down
- 300 lbs. capacity



LITTLEG10410BA 4 STEP

SAFETY STEE

JOBSITE SAFETY- CAUTION

Hazard/Warning Tape

• 3" wide



WARNINGTAPE



Caution/Danger Tape

- Bilingual
- 3" wide





DANGER / PELIGRO



TAPECAUTION 1000 **TAPEDANGER**



Hand Held Air Horn & Refill

- Non-flammable
- Ozone safe
- 8 oz. can



Reinforced Caution Tape

 Polyethylene with woven polyester fibers





TAPECAUTION REINFORCES



Day/Night Visibility Tape

• 3" wide



TAPECAUTION-REF TAPEDANGER-REF



Pennant Flags

 Double sewn into plastic covered, sag resistant rope



PENNANTFLAG-100YELLOW PENNANTFLAG-100RED



Carnie Rebar Cap

Holds 2 x 4's or 2 x 6's



CARNIE CAP CARNIECAP

Square Top Rebar Cap

- Protection while working above rebar
- OSHA approved



Mushroom Top Rebar Cap


 Protection while working around rebar



JOBSITE SAFETY- RIGGING

Tuflex Round Sling

Color coded to indicate capacity

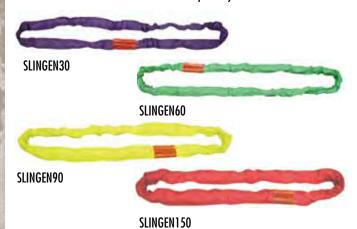

		Rated Capacity (lbs.)*				
			Vertical	Choker	Basket	Basket
Part No.	Color				@ 90 °	@ 45 °
EN30	Purple		2,600	2,100	5,200	3,600
EN60	Green		5,300	4,200	10,600	7,400
EN90	Yellow		8,400	6,700	16,800	11,800
EN120	Tan		10,600	8,500	21,200	14,000
EN150	Red		13,200	10,600	26,400	18,000



WARNING



Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°

Tuff Edge Slings

- Rated Load Capacity for 3", 2 ply vertical 8800, choker 7040, basket @ 90° 17,600
- Available in 1" to 12" width & various lengths



SLING3



Ratchet Tie Down Strap

- 1" x 15"
- Ultimate strength 2100 lbs.
- Working load limit 700 lbs.
- PE coated open hook



TIEDOWN1



Ratchet Tie Down Strap

- 2" x 27'
- Ultimate strength 10,000 lbs.
- Working load limit 3,000 lbs.
- Flat hook end fittings
- Long handle ratchet



TIEDOWN2



Strap Assemblies

- Ultimate strength 15,000 lbs.
- Available web width 3" to 4"
- Available lengths 27' to 30'
- Working load limit 5,000 lbs.
- Flat hook end fitting



TIEDOWN3 -27 TIEDOWN3 -30

TIEDOWN4 -27 TIEDOWN4 -30



JOBSITE SAFETY- SECURITY

Choose the padlock features that best meet your security needs						
		Securit	y Level			
Physical Security	Higher					Lower
Cut Resistance:						
Shackle Material	Shackle Shrouded	Boron Alloy	Hardened Steel	Stainless Steel	Steel	Brass
Shackle Diameter	7/16"	3/8″	5/1	16"	1/4"	3/16"
Lock Material	Hardened Steel		Stee	el		Brass, Aluminum
Shackle Locking	Dual Ball Bearing		Du Lev			Single Lever
Pick Resistance (pin tumbler)	7-pin	6-pin	5-pin	4-pin	3-pin	Warded
Weather Resistance	Covered	Stainless Steel	Bra Alumi		Plated Steel	

Brass Shrouded Combination Lock

- Deadlock mechanism protects against prying
- No reset tool or key necessary



Combination Locks

• Reset to personal combination

Brass Die Cast







MAS178D

Master,

Commercial Locks

- Shackle dimensions
- No. 1 3/8' x 1" x 16/16"
- No. 3 9/32" x 3/4" x 5/8"
- No. 5 3/8" x 1" x 5/16"



MAS1 DCOM MAS3DCOM MAS5DCOM

Master,

No. 5 Commercial Padlock

- Several key codes available
- Reinforced rivets resist prying
- Hour glass reinforced keyway resist drilling



MAS5KAA112 MAS5KAA1384 MAS5KAA272

MAS5KAA115 MAS5KAA142 MAS5KAA559

Master

No. 5 Padlock

- Keyed alike
- 2 pack



MAS5TPF

Master,

No. 5 Padlock

- Keyed alike
- 3 pack



MAS5TRILFPF

Master,

Solid Body Padlock

- 5 pin tumbler
- 1" & 2" shackle heights



MAS930DLHPF

Master,

Compact Lockout Pouch

Electrical



Personal Lockout Kit

Electrical



American Padlock

• No shackle, 2-1/2" solid steel



MASA2000D

Master

Stainless Steel Padlock

- Shielded shackle
- 2-3/4" round



MAS40DPF

Master

Mini U-Lock

- 7 pin cylinder
- Shackle withstands 3 tons of pull force



MAS8118DPF

Master

Cut Resistant Chain

 Black nylon sleeve protects against damaging equipment



Steel Braided Cable

Looped ends



Adjusting Cable Master Lock

- Rust resistant
- 6 ft.



MAS8413DPF

Master





JOBSITE SAFETY- COMMUNICATIONS

2 Watt 4-Channel Radio

- Crisp, clear audio
- 15 hrs battery life
- Repeater capability



MOTRMU2040

MOTOROLA SOLUTIONS

2 Watt 8-Channel Radio

- Crisp, clear audio
- 15 hrs battery life
- Repeater capability



Remote Speaker Radio Microphone

Talk and listen without reaching for radio



M0T53862

MOTOROLA SOLUTIONS



Project Managers

General Contractors

Architects

Plumbers

Electricians

Roofers

Painters

HVAC Contractors

Security



Multi Unit Charger

• Hold up to six radios at once



MOTPMLN6384

MOTOROLA SOLUTION

USB Programming Cable

Use your computer to program your RM series radios



MOTHKKN4027

MOTOBOLA SOLUT

JOBSITE SAFETY- ATMOSPHERE CONTROL

TESTING THE ATMOSPHERE

Never assume that the air inside any confined space will support human life until it has been tested. Always determine the oxygen level in the confined space before allowing personnel to enter. It may save a life or eliminate the chance of an explosion.

IMPORTANT THINGS TO REMEMBER

The chemistry of a gas or vapor determines its weight. Gases heavier than air will settle to the bottom area inside a confined work space. Gases lighter than air will be found around the top area inside a confined workspace. Because gases at any level can be dangerous, it is necessary to test all area (top, middle and bottom) of a confined work space with properly calibrated testing instruments to determine exactly what types of gases are present and their relative concentration levels. If testing reveals an atmosphere that is oxygen deficient/enriched, contains a gas or a mixture of gases classified as hazardous, or the presence of toxic gases or vapors, the confined work space must first be ventilated with proper type of air ventilation blower and then retested as necessary before workers are allowed to enter.

THE BOTTOM LINE:


Never trust your senses to determine if the atmosphere inside a confined work space is safe! You can not see or smell many toxic gases or vapors. You can not determine the oxygen level by sense alone. Use proper testing equipment. Follow the proper procedure. Retest as necessary.

Gasoline Nonhazardous Blower

- 4 HP Honda motor, with oil alert
- 8" inlet and outlet diameter





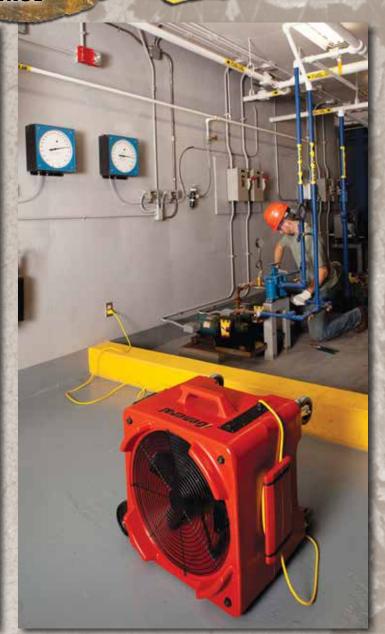



GENGP8H

JOBSITE SAFETY- ATMOSPHERE CONTROL

0.4 HP AC Electric Nonhazardous Blower

- 115 volt AC, 60 HZ, single phase motor
- Molded thermoplastic housing
- Swivel type caster wheel set



1.0 HP AC Electric Nonhazardous Blower

- 115 volt AC, 60 HZ, single phase motor
- Molded thermoplastic housing
- Steel blower wheel

GENCD10P



GENEP20ACP

.33 HP AC Electric Nonhazardous Blower

- 115 volt AC, 60 HZ, single phase motor
- 8" inlet and outlet diameter
- Molded thermoplastic housing



1.0 HP AC Electric Nonhazardous Blower

- 115 volt AC, 60 HZ, single phase motor
- 12" inlet and outlet diameter
- Molded thermoplastic housing



Nonhazardous Blower Accessories

- 8" nominal diameter
- Nylon ring and securing strap at each end
- Temperature range -20°F to 250°F



GENFD815 - X15 GENFD825 - X25



Nonhazardous Blower Accessories

- 12" nominal diameter
- Nylon ring and securing strap at each end
- Temperature range -20°F to 250°F



JOBSITE SAFETY- EROSION CONTAINMENT

Straw Wattle

- 9" x 25'
- Made of recycled rice straw
- Contained in tubular black netting



1" x 2" x 18" Wood Stakes

• 50/bundle



STRAWATTLESTAKE

Jute Mesh

- 4' x 225'
- Loosely twisted construction
- Does not vary in thickness



Silt Fence

- 3' x 100'
- Includes 11 stakes



SILTFENCE

Sandbags

- Available filled or empty
- Durable woven polypropylene



Gravel Snake Bags

- 11" x 96"
- High quality polymer material
- High UV rating allows multi-year life





JOBSITE SAFETY- EROSION CONTAINMENT

Drain Guard

- 48" x 36" x 18"
- Holds up to .87 gallons of oil , 40 lbs. of sediment
- Removes hydrocarbons, dirt and sand







High Capacity Drain Guard

- 60' x 60" x 24"
- Holds up to 1.9 gallons of oil , 300 lbs. of sediment
- Uses grating & retainer bars to secure in place



ULTRATECH9393



Dewatering Bags

- Retains both oil and sediment
- Accommodates up to 4" discharge hose



6 x 6 **ULTRATECH9724** 15 x 15 ULTRATECH9727



Reusable Dewatering Bags

- Bag with locking rods
- Large 3' 5' removal access
- Galvanized steel locking rods



 3×5 ULTRATECH9730 5 x 7 ULTRATECH9732



Curb Guard Plus

- 4" x 36"
- Units can be connected to form longer lengths
- Wedge shaped, heavy duty foam



ULTRATECH9248

Ultra Pipe Sock

- 60" long
- Oil absorption capacity 0.81 gallons



8" Dia ULTRATECH9705 12" Dia ULTRATECH9706 16" Dia ULTRATECH9707



JOBSITE SAFETY- CONTAINMENT

Temporary Spill Berm

• Standard 10 ft. sections can be cut to fit



Square Temporary Drain Seal

Seals to any smooth surface



3/8" Thick

18 x 18 ULTRATECH2126

ULTRATECH2126 24 x 24

36 x 36 ULTRATECH2130

ULTRATECH2127

42 x 42 ULTRATECH2131

48 x 48 ULTRATECH2132

54 x 54 ULTRATECH2133



Collapsible Wall Containment Berm

- Rugged PVC sidewall assemblies for support
- Swivel the feet to lower or raise sidewalls



6 x 6 ULTRATECH8403

10 x 10 ULTRATECH8400

12 x 60 ULTRATECH8404

15 x 50 ULTRATECH8401



Self Bailer

- Filters hydrocarbons from storm water in outdoor containment products
- Simple installation



28" x **3.5"** ULTRATECH9935

36" x **4.5"** ULTRATECH9937

39" x **6.5"** ULTRATECH9926

43" x **9"** ULTRATECH9928



Rapid Rise Containment Berm

- Sidewalls stay down while loading and unloading
- Foam flotation ring will lift the sidewalls up to the level of the spill up to a 12" sidewall



4 x 6 ULTRATECH8430 10 x 10 ULTRATECH8432 12 x 26 ULTRATECH8437 15 x 50 ULTRATECH8433



Ultimate Containment Berm

 Living hinge design for no manual raise or lowering of the end walls



12 x 60 ULTRATECH8505 15 x 50 ULTRATECH8506 15 x 66

ULTRATECH8507



JOBSITE/FACILITY SAFETY- CONTAINMENT

Containment Sumps

- Polyethylene construction will not rust or corrode
- One piece molded design with drain




275 ULTRATECH2801 550 ULTRATECH2820 1000 ULTRATECH2831



Full Drum Top Funnel

• Funnel allows access to the 3/4" drum bung



Burp Free Funnel

• Built in vent prevents splashing or burping when pouring liquids



Large ULTRATECH0656 **Standard** ULTRATECH0651



Overpacks

• High density polyethylene construction offers excellent chemical resistance



Utility Trays

• Available in six sizes for a variety of applications




ULTRATECH $1031 - 12 \times 48 \times 4^{3/4}$ ULTRATECH $1034 - 24 \times 36 \times 4^{3/4}$ ULTRATECH 1035 - 36 x 36 x 4 3/4 ULTRATECH $1032 - 24 \times 48 \times 4^{3/4}$ ULTRATECH $1033 - 30 \times 48 \times 4^{3/4}$ ULTRATECH1036 — 40 x 48 x 3 1/2



Sidewinder Cable Protection System

Flexible design, curves, corners, and s-curves



MODEL#	COLOR	DESCRIPTION
ULTRATECH1800	Black & Yellow	SM 3-Foot System with Endcaps
ULTRATECH1801	Black & Yellow	SM 1-Foot Extension System
ULTRATECH1820	Black & Yellow	24-Foot Bulk Box System
ULTRATECH1802	Black	SM 3-Foot System with Endcaps
ULTRATECH1803	Black	SM 1-Foot Extension System
ULTRATECH1804	Brown	SM 3-Foot System with Endcaps
ULTRATECH1840	Black& Yellow	LG 3-Foot System with Endcaps

JOBSITE/FACILITY SAFETY- CONTAINMENT





IBC Spill Pallet

- Economical and portable
- Forkliftable



With Drain ULTRATECH1158

Without Drain ULTRATECH1157

1-Drum Lockable Outdoor Containment Unit Convenient roll-top slides up and out of the way



2-Drum Hard Top Containment Unit

and large conical funnel



Easily accommodates rotary drum pumps

With Drain ULTRATECH9613

Without Drain ULTRATECH9612

Without Drain ULTRATECH9640

With Drain

ULTRATECH9641

4-Drum Hard Top Containment Unit

Drums are easily accessed from either side with dual closure



With Drain ULTRATECH9637

Without Drain ULTRATECH9636



JOBSITE/FACILITY SAFETY- SORBENTS



Spilhyder® Universal Pads & Rolls

- Heavy and medium duty
- Eliminates fiber contamination
- Durable for high traffic areas



Camo pattern completely hides spills

SS Spilfyter

CAMOUFLAGE

SPILLDS-75 —Heavy 16" x 18" Pads SPILLDS-93 — 32" x 150' Heavy Roll SPILLDS-94 — 16" x 150' Heavy Roll GRAY

SPILLDS-72 – Medium 16" x 18" Pads SPILLDS-97 – 32" x 150' Medium Roll

Spilfyter® Universal Pads & Rolls

- Heavy, medium, light duty pads
- Great wicking and performance
- Disguises grime, unsightly spills
- Dimple bond pattern increases physical strength



Spilfyter® Oil Only Pads

- Heavy duty, 16" x 18"
- Vertically perforated for customized fit
- Place under oil leaks and around machines



Spilfyter® Universal Sock

- 3" x 4'
- Shapeable to surround and absorb leaks around odd shaped machinery



JOB/FACILITY SAFETY- SORBENTS



REGULATIONS	APPLICABLE PRODUCTS
29 CFR 1910.120(J)(viii) where major spills may occur, a spill containment program, which is part of the employer's safety and health program required in paragraph (b) of this section, shall be implemented to contain and isolate the entire volume of the hazardous substance being transferred.	SORBENTS, SPILL KITS
29 CFR 1910.22(A)(2) floors in your workplace should be "Maintained in a clean and, so far as possible, a dry condition."	SORBENTS, SPILL KITS
29 CFR 1910.107(B)(3) if floors in a spray booth or work area are combustible, they "Shall be covered with non-combustible material of such character as to facilitate the safe cleaning and removal of residues."	SORBENTS, SPILL KITS
29 CFR 1910.120(J)(1)(vii) U.S. Department of transportation specified salvage drums or containers and suitable quantities of proper absorbent shall be kept available and used in areas where spills, leaks, or ruptures may occur.	SPILL KITS
40 CFR 112.7(C)(1)(vii) facilities that have the potential to pollute waterways must have "Appropriate containment and/or diversionary structures or equipment to prevent discharge oil from reaching a navigable water course."	OIL-ONLY SORBENTS, OIL-ONLY BOOMS
40 CFR 112.7(C)(1)(iv) booms and other barriers are considered an "Appropriate containment and/or diversionary structures or equipment to prevent a discharge."	OIL-ONLY SORBENTS, OIL-ONLY BOOMS
40 CFR 263.30(A) in the event of a spill, transporters must "Take appropriate immediate action to protect human health and the environment."	GRAB & GO VEHICLE SPILL KITS
40 CFR 263.31 Summary transporters must clean up any hazardous waste discharge that occurs during transportationso that the hazardous waste discharge no longer presents a hazard to human health or the environment.	GRAB & GO VEHICLE SPILL KITS
29 CFR 1910.107(G)(2) OSHA requires all spraying areas to be "Kept as free from the accumulation of deposits of combustible residues as practical."	SORBENT PADS & ROLLS
OSHA 1910.120(Q)(3)(ii) the individual in charge of the ICS (incident control system) shall identify, to the extent possible, all hazardous substances or conditions present and shall address as appropriate site analysis, use of engineering controls, maximum exposure limits, hazardous substance handling procedures, and use of any new technologies.	CHEMICAL & WASTEWATER CLASSIFIERS
1910.178(G)(2) states that facilities using batteries containing electrolyte/battery acid must provide a contingency plan in case a spill occurs.	BATTERY ACID SPILL KITS
1910.1048(J)(2) "in work areas where spillage may occur, the employer shall make provision to contain the spill, to decontaminate the work area, and to dispose of the waste."	FORMALDEHYDE SPILL CONTROL
1910.1048(J)(3) "the employer shall assure that all leaks are repaired and spills are cleaned properly by the employers wearing suitable protective equipment and trained in proper methods for cleanup and decontamination."	FORMALDEHYDE SPILL CONTROL
Mercury spill control OSHA hospital recommendations: "Use mercury spill kits to help clean up small spills of 25 ml or less. Kits should contain gloves, protective glasses, hg absorb powder, mercury sponges, and a disposal bag."	MERCURY SPILL CONTROL PRODUCTS
1910.120 1910.120 (K)(2)(i) a decontamination procedure shall be developed, communicated to employees and implemented before any employees or equipment may enter areas on site where potential for exposure to hazardous substances exists.	DECONTAMINATION PRODUCTS

JOB/FACILITY SAFETY- SORBENTS

Streetfyter® Universal Pads

- Light weight, 16" x 18"
- Vertically perforated
- Dimple bonded for strength
- Packaged for outside storage
- Exceptional value



Streetfyter® Oil Only Pads

- Light weight, 16" x 18"
- Absorbs oil from water or land
- Exceptional value
- No bonding for more surface area absorption



Grab & Go Zipper Bag Universal 5 Gallon Spill Kit

- (3) 3" x 4' socks
- (1) Pair splash goggles
- (20) 16" x 18" pads
- (1) Disposal bag & twist tie
- (1) Pair nitrile gloves
- (1) Clear zipper bag



Grab & Go Zipper Bag Universal 13 Gallon Spill Kit

- (3) 3" x 10' socks
- (1) Pair splash goggles
- (3) 18" x 18" pillows
- (15) 16" x 18" pads
- (1) Disposal bag & twist tie
- (1) Pair nitrile gloves
- (1) Clear zipper bag



30 Gallon Drum Spill Kit

- (12) 3" x 4' socks
- (1) Pair splash goggles
- (125) 16" x 18" pads
- (1) Disposal bag & twist tie
- (1) Pair nitrile gloves
- (1) 30 gallon poly drum



55 Gallon Drum Spill Kit

- (20) 3" x 4' socks
- (1) Pair splash goggles
- (200) 16" x 18" pads
- (1) Disposal bag & twist tie
- (1) Pair nitrile gloves
- (1) 55 gallon poly drum



JOBSITE/FACILITY SAFETY- PROTECTORS

Bollard Posts

- Made of 1/4" thick schedule 40 steel
- Pre drilled plates for easy install

Round




Anchor hardware not included

			Anchor naray	vare not included
MODEL#		ITEM	DIMENSIONS	PLATE SIZE
EAG1742	4"	Round	24" h x 4.5"	8" x 8" x 3/8"
EAG1743	4"	Round	36" h x 4.5"	8" x 8" x 3/8"
EAG1744	4"	Round	42" h x 4.5"	8" x 8" x 3/8"
EAG1749	4"	Round Post Cap	5" Dia.	NA
EAG1755	5"	Round	24" h x 5.6"	10" x 10" x 3/8"
EAG1756	5"	Round	36" h x 5.6"	10" x 10" x 3/8"
EAG1757	5"	Round	42" h x 5.6"	10" x 10" x 3/8"
EAG1758	5"	Round Post Cap	5.85" Dia.	NA
EAG1752	5"	Square	24" h x 5"	10" x 10" x 3/8"
EAG1753	5″	Square	36" h x 5"	10" x 10" x 3/8"
EAG1754	5"	Square	42" H X 5"	10" x 10" x 3/8"
EAG1759	5"	Square Post Cap	5.25" Sq.	NA
EAG1763	6"	Round	36" h x 6.625"	10" x 10" x 3/8"
EAG1764	6"	Round	42" H X 6.625"	10" x 10" x 3/8"
EAG1769	6"	Round Post Cap	7" Dia.	NA

Machine Guards

- Made of 1/4" thick schedule 40 steel
- Pre drilled plates for easy install






Anchor hardware not included

MODEL#		ITEM	DIMENSIONS	PLATE SIZE
EAG1765	4″	Low Profile Rack	9" h x 36"	8" x 8" x 3/8"
EAG1745	4"	Low Profile Rack	9" h x 48"	8" x 8" x 3/8"
EAG1772	4"	Rack Guard	16" h x 36"	8" x 8" x 3/8"
EAG1773	4"	Rack Guard	16" h x 48"	8" x 8" x 3/8"
EAG1776	4"	Machine (Low)	24" h x 36"	8" x 8" x 3/8"
EAG1770	4"	Machine (Low)	24" h x 48"	8" x 8" x 3/8"
EAG1774	4"	Machine Guard	36" h x 36"	8" x 8" x 3/8"
EAG1775	4″	Machine Guard	36" h x 48"	8" x 8" x 3/8"
EAG1771	4"	Machine (High)	42" h x 36"	8" x 8" x 3/8"
EAG1747	4″	Machine (High)	42" h x 48"	8" x 8" x 3/8"

Wall Protectors










Anchor hardware not included

MODEL#		ITEM	DIMENSIONS
EAG1726	6"	Wall Protector (set of 2)	6" w x 42" L x 2"d
EAG1728	10"	Wall Protector (set of 2)	10" w x 42" L x 2" d

Corner Protectors







Anchor hardware not included

MODEL#		ITEM	DIMENSIONS
EAG1720	21"	Corner Protector (set of 2)	21" h x 6" x 10" w
EAG1725	42"	Corner Protector (set of 2)	42" h x 6" x 10" w

JOBSITE/FACILITY SAFETY- PROTECTORS

Column Protectors Profiles



1	71	2

Column Size

Model

12" Column

1710



10" Column

1709



9" Column

1708



8" Column

1706



6" Column

1704




4-6" Column

No Tools Required



Yellow Column Protectors





• Key lock to prevent slippage




Two halves attach with easy-to-install straps

	•	•
MODEL#	ITEM	DIMENSIONS
EAG1704	Protector for 4-6" Column	13" x 13" x 42"
EAG1706	Protector for 6" Column	24" x 24" x 42"
EAG1708	Protector for 8" Column	24" x 24" x 42"
EAG1709	Protector for 9" Column	24" x 24" x 42"
EAG1710	Protector for 10" Column	24" x 24" x 42"
EAG1712	Protector for 12" Column	24" x 24" x 42"

Hi-Vis Column Protectors







The harves ander with easy to mistan shaps				
MODEL#	ITEM	DIMENSIONS		
EAG1706LM	Column for 6" Lime w/ Reflective	24" x 24" x 42"		
EAG17060R	Column for 6" Orange w/ Reflective	24" x 24" x 42"		
EAG1708LM	Column for 8" Lime w/ Reflective	24" x 24" x 42"		
EAG17080R	Column for 8" Orange w/ Reflective	24" x 24" x 42"		
EAG1709LM	Column for 9" Lime w/ Reflective	24" x 24" x 42"		
EAG17090R	Column for 9" Orange w/ Reflective	24" x 24" x 42"		
EAG1710LM	Column for 10" Lime w/ Reflective	24" x 24" x 42"		
EAG17100R	Column for 10" Orange w/ Reflective	24" x 24" x 42"		
EAG1712LM	Column for 12" Lime w/ Reflective	24" x 24" x 42"		
EAG17120R	Column for 12" Orange w/ Reflective	24" x 24" x 42"		

Mini Column Protectors








Two halves attach with easy-to-install straps

		-	-
MOD	EL#	ITEM	DIMENSIONS
EAG1	724-6	Protector for 6" Column, Yellow	24" x 24" x 42"
EAG1	724-6 RED	Protector for 6" Column, Red	24" x 24" x 42"
EAG1	724-8	Protector for 8" Column, Yellow	24" x 24" x 42"
EAG1	724-8 RED	Protector for 8" Column, Red	24" x 24" x 42"
EAG1	724-10	Protector for 10" Column, Yellow	24" x 24" x 42"
EAG1	724-10 RED	Protector for 10" Column, Red	24" x 24" x 42"
EAG1	724-12	Protector for 12" Column, Yellow	24" x 24" x 42"
EAG1	724-12 RED	Protector for 12" Column, Red	24" x 24" x 42"

ABC Dry Chemical Fire Extinguisher







Halotron Fire Extinguisher

- 5 lbs.
- Clean non-conductive gaseous agent
- Ideal near electronic equipment
- Comes with vehicle bracket



FIREEXT-70550

Decorative Safe Smoker Cigarette Receptacle

- 5 gallon capacity
- Made of polyethylene with **UV** inhibitors
- Galvanized steel bucket

EAG1205BEIGE EAG1205YELLOW



Safe Smoker Cigarette Receptacle

- 5 gallon capacity
- Made of polyethylene with **UV** inhibitors
- Galvanized steel bucket

EAG1200BEIGE EAG1200YELLOW



60 Gal. Safety Cabinet

- Internal and external welded construction
- Three point latch system
- Self closing doors
- Two shelves





Single Door EAG6110

30 Gal. Standard Safety Cabinet

- Continuous piano hinge
- Self closing doors
- One shelf
- Key lock



EAG3010



45 Gal. Tower Safety Cabinet

- 2" raised leakproof seal
- Self closing doors
- Two shelves
- Ground connection



EAG4510LEGS

Patented Comfort Grip Trigger Release

Spring Closing Lid with Neoprene Gasket Vents at 5 psi Internal Pressure

Fixed Handle

Non-Sparking Flame Arrestor and Pour Spout

Baked on Powder Coat Finish —

Double Interlock No-Weld Bottom Seam

Meet OSHA & NFPA Code 30 Requirements, FM, ULC Approved

EATLE SAFE

MANUFACTURING COMPANY

VELLSBURG, W. VA. 26070 UI-50 S TYPE I

5 GALLON — GASSAF5

Lead-Free Technology
Featuring Environmentally
friendly hot dipped 24-Gauge
Galvanized Steel

Optional F-15 HDPE Funnel Fits Unleashed Fuel Tanks

The Only Deep
Drawn Seamless
—— Can Made

Deep Drawn Construction Means No Top or Side Seam

Trilingual Label



1 GALLON — GASSAF1 2 GALLON — GASSAF2



5 GALLON - GASSAF5Y



2 GALLON — GASSAF2FLEX 5 GALLON — GASSAF5FLEX



Metacaulk 1000 Intumescent Firestop Sealant

- Water based
- Excellent freeze thaw
- Flexible set
- **Paintable**
- Safe and easy to use
- Highly intumescent
- VOC compliant

MET66309 - 5 GALLON MET66312 — 20.2 oz. SAUSAGE MET66302 - 10.3 oz. CARTRIDGE



Metacaulk 350i Intumescent **Firestop Sealant**

- Highly intumescent
- Water based
- Excellent freeze thaw
- Flexible set
- Paintable
- Safe and easy to use
- VOC compliant
- Protected against mold growth

MET66611 - 20.2 oz. SAUSAGE



RECTORSEAL

Metacaulk MC 150 + Firestop Sealant

- Water based
- Excellent freeze thaw
- Flexible set
- **Paintable**
- Safe and easy to use
- Intumescent
- VOC compliant

MET66382 — 10.3 oz. MET66385 — 20.2 oz. SAUSAGE MET66389 - 5 GAL





Metacaulk Fire Rated Mortar

- 20 lbs.
- Water based
- Excellent freeze thaw
- Flexible set
- **Paintable**
- Safe and easy to use
- Intumescent
- **VOC** compliant



MET66331



Metacaulk Putty Pad

- 7" x 7" x 1/8"
- Adheres to all common building surfaces
- Single component putty system
- Intumescent properties
- No asbestos fillers
- Easy to install
- DOT classification



MET66335

RECTORSEAL

Metacaulk Putty Stick

- 5" x 11" x 8"
- Hand moldable
- Will not dry out, reusable
- Intumescent properties
- No asbestos fillers
- Easy to install
- DOT classification



MET66345

RECTORSEAL

Metacaulk Composite Sheet

- 36" x 36"
- Easy install using common trade tools
- Lightweight easy to handle
- Intumesces
- Thermally conductive
- UL classified
- Re-enterable



MET66320

Metacaulk Fire Stop Pillows

- 2 available sizes
- Easy install no tools required
- Forms very hard char when burned
- Highly intumescent

Versatile



 $MET66362 - 2 \times 9 \times 6$ $MET66363 - 3 \times 9 \times 6$

RECTORSEAL

Metacaulk Fire Stop Cover Guard

- 3 available sizes
- Great for safe retrofit applications
- Reduces sound transmission

Easy to install



MET66265 - SINGLE DECOR MET66272 — SINGLE RECEPTACLE MET66276 — SINGLE SWITCH

RECTORSEAL

Metacaulk Fire Stop Box Guard

- 3 available sizes
- Adheres to back of electrical box
- Dielectric breakdown voltage 22V/mil
- Non conductive
- Highly intumescent




MET66366 - SINGLE MET66367 - DOUBLE 4 x 4 MET66369 - 4-11/16 x 4-11/16

RECTORSEAL

Metacaulk Intumescent Pipe Collars

- 2 available sizes
- Easy installation
- No measurement of material required
- Tested for PVC, CPVC, ABS and PVC/ABS foam core, FRPP



MET66350 - 3''MET66353 - 2''



Kool Rod Backer Rod

- Closed cell, polyethylene, flexible
- Rope like foam joint backing material
- Easily compressible, lightweight
- Installs quickly, stays in place
- Sealants will not adhere to rod



V. R. MEADOWS SEAUTIGHT.

TRAFFIC SAFETY- WARNING PANELS

Detectable Warning Panels

- ADAAG compliant
- Approved by DOT's
- 5 year manufactures warranty
- Extremely durable
- Easy to install





Cast in Place



Radius Cast in Place



Surface Mount



Wet Set Basics

Pour concrete, contractor establishes finished grade.
Place the polymer concrete panel on top and tap in place.
Final panel elevation needs to be verified.
Make sure proper slope is obtained as specified in the contract document.



Surface Mount Basics

Installation area needs to be dry.

Concrete should be cured for a min of 21 days.

Area and back of panel must be clean.

Apply uniform bead of adhesive to scratched rib areas, and to all four edges to properly seal panel perimeter.

Place panel at desired location and apply pressure.

Clean away excess adhesive.



Available Sizes

2' X 2' 2' X 3' 2' X 4' 2' X 5' 3' X 4' 3' X 5'

Available Colors







TRAFFIC SAFETY- WARNING PANELS

Detectable Warning Tiles

- Can be applied to concrete and asphalt surfaces
- 5 year manufactures warranty
- Easy to install

TOUGH-EZ TILES



PEEL & STICK

PREP



Outline Location



Grind Surface



Clean Area

SET



Apply Primer



Remove Paper Backing



Set In Place

SEAL



Apply Even Pressure



Apply Perimeter Seal



Ready To Use

Available Sizes

24" X 24" 24" X 36" 24" X 48" 24" X 60" 36" X 30" 36" X 48"

Available Colors







TRAFFIC SAFETY- BARRICADES

A-Frame Barricade

- Use as type I or type II barricade or a sign stand
- Angled 15° for greater stability
- Lightweight
- Manufactured from a specially formulated plastic compound



A-Frame Plastic Barricade

- Use as type I or type II barricade or a sign stand
- Strong one piece design
- Manufactured from a specially formulated plastic compound

Lightweight

TD2150



Wood Panels Barricade

- Legs are 45" manufactured using galvanized steel in 12 and 14 gauge thickness
- Hinge holes accommodate 1/2" warning light mounting bolts



Traffic Cone

- Polyguard cone is 100% fluorescent orange PVC
- Inside wall has special basket ball grip



Ringtop Portable Delineator

- Diamond series 8 lb. base
- Bolt hole for warning lights
- Available with 10 & 12 lb. base



Slim Line Channelizer

TD2300

TD7500

- Two piece stackable 42" cone and 10 lb. rubber base
- Bolt hole for warning lights



Reboundable Delineator

- Surface mount base handles high impact work zones
- Polymer base will not crack or split



Surface Mount Delineator

- Perfect for temporary or permanent applications
- High impact resistant



Universal Vertical Panel

- Injection molded for durability
- Recessed design protects sheeting from wear & tear
- Accepts A & C warning lights



1

TrafficWORKS

ID5200

TD5300


TD6500

12" x 18" Waterproof Polyboard Signs



NO STOPPING	NO STOPPING	NO NO	TEMPORARY NO	NO NO	TEMPORARY NO	TEMPORARY NO
CONSTRUCTION ZONE	0478	PARKING	PARKING	PARKING	T100 C#71	PARKING
CONSTRUCTION WORK HAS NOT BEGUN BY 12 SE NOON	C.V.C. 22651			C.V.C.22651	STREET PAVING	SPECIAL EVENT

24" x 24" Water Resistant **Polyboard Reflective Construction Signs**



10" x 14" Thick Plastic with Holes in Corners

















RIGHT TURN

ONLY











PREPARI TO STOR











































































24"x36" Plastic Sign



ORANGE/BLACK



36"x12"

24"x24" TWO COLOR RED/BLACK









WHITE 30"x24"

TRAFFIC SAFETY- SIGNS/PARKING

Boomerang Handicap Parking Only Sign

- Reboundable base system
- Can withstand impact from any direction
- Three ways to mount the base
- Post height 60"

TD5200



CAUTION

Stays in place

EZ Clip Signs





Made from ABS with polymer protection and UV stabilizers

KEEP LEFT

TD12100-2

TD12100-3



DO NOT **ENTER**



TD12100-8

TD12100-36



TD12100-12







TD12100-10

TD12100-39

TD12100-30 TraffieWORKS

Concrete Depleting? Parking Stops That Take a Beating









"Parking Lot Safety & Damage Prevention Solutions"







Easy-to-Install Rubber Speed Bumps

TRAFFIC SAFETY- PARKING

4' Parking Stops



- Available in black with yellow stripes
- 100% recycled rubber
- Easy install
- 3 spikes needed



GNR14101

Speed Bump Yellow & Black



- Available in 4' and 6'
- 4' bump 3 spikes needed 6' bump 4 spikes
- 100% recycled rubber
- Cat's eye reflectors



6' Parking Stops



- 100% recycled rubber
- Easy install
- 4 spikes needed



Speed Bump End Cap



• 9" x 12" x 2.25"


GNR24111 - 4ft. GNR26111 - 6ft.


- 100% recycled rubber
- 1 spike needed



GNR26999

Mini Speed Hump






Easy install

GNR23500V



Corner Guard









GNR

GNRCG800

Mini Speed Hump End Caps



- 35.5" x 19.5" x 2.1"
- Includes: 6 bolts
- Easy install





Wall Protector



- 3.3' x 6" x 2"
- 100% recycled rubber
- 3 screws needed



GNRWP1000

Now Serving all Your Building Needs in Anaheim California

Great Inventory
Great Sales Team
Great Customer Service
Great Jobsite Delivery



1335 S. Claudina St.
Anaheim, CA 92805 Tel: 714.204.3200 • Fax:714.204.3220



Temporary Power Box

- Locking
- 50 amps
- 6 L5-20R receptacles
- 1 L6-30R receptacles



TEMPBOXVOL09-00675

Portable Power Distribution Center

- GFCI protected
- 50 amps
- 6 L5-20 receptacles
- 1 L6-30 receptacles



Temporary Power "Y" Adapter

- 6/3-8/1 gauge
- 50 amps
- 2 outlets
- 2 ft. cord



VOL09-00435

VOLTEC

Temporary Power Cords

- 6/3-8/1 gauge
- 50 amps
- 1 outlet

TEMPBOX

50 ft. VOL09-00214



VOLTEC POWER & LIGHTING

Replacement Temporary Power Cord Ends

- Nylon
- 50 amp



Male

VOL12-00242V



GENERAL- ELECTRICAL

2' Power Block

- 12/3 gauge
- 3 outlets
- 15 amps



U-Ground to U-Ground

VOL04-00090

Twist Lock to U-Ground

VOL04-00091

VOLTEC

1' U Ground Twist Lock

- 12/3 gauge
- 1 outlet

Male to Female

15 amps



Female to Male



VOL04-00093

2' W Adapters

VOLTEC POWER & LIGHTING

2' Y Adapters

- 12/3 gauge
- 2 outlets



U-Ground

Twist Lock

• 15 amps VOL04-00094

• 20 amps

VOL04-00095

3 outlets



U-Ground

Twist Lock

• 15 amps VOL04-00096

• 20 amps VOL04-00097

VOLTEC

2' 15 Amps In Line GFCI

- With power block
- 12/3 gauge
- 3 outlets



VOL04-00105

VOLTEC

VOLTEC POWER & LIGHTING

3' 20 Amps In Line GFCI

- With lighted power block
- 12/3 gauge
- 3 outlets



VOL04-00102

- 3' 20 Amps In Line GFCI With twist lock
- 12/3 gauge
- 1 outlet

VOL04-00104



2' Generator W Adapter

- Twist lock plug, lighted ends
- 3 u-ground outlets
- 15 amps
- 12/3 gauge



VOL04-00200

GENERAL- ELECTRICAL/LIGHTING

6 Outlet Power Strip

- 14/3 gauge
- 15 amps
- 6 ft. cord



Outdoor 30A 250V Twist Lock 100 ft. Extension Cord

- 10/3 gauge
- 25 amps
- 1 outlet



3-Conductor 100 ft. Twist **Lock Extension Cords**

• 1 outlet

300V Jacket

- 10/3 gauge
- 20 amps VOL05-00333



- 12/3 gauge
- 15 amps VOL06-00168



3-Conductor Twist Lock 300V Extension Cord

- 12/3 gauge
- 1 outlet

VOL11-00223

50 ft.

 20 amps VOL05-00128

100 ft.

• 15 amps VOL05-00131

VOL08-00203



3-Conductor U-Ground 300V Extension Cord

- EZ-lock adapter
- Lighted ends
- 12/3 gauge
- 15 amps
- 1 outlet

50 ft. VOL05-00106

100 ft. VOL05-00107



Plastic Cage Light Strings

- With locking connectors
- 100 ft.
- 12/3 gauge
- 10 bulb sockets



Replacement Cage



VOLTEC

Halogen Bulb

500 Watt

VOL08-00031



Rough Service Light Bulb

• 60 & 75 Watt



BULBHD60 - 60 Watt BULBHD75 - 75 Watt

GENERAL-LIGHTING

Eco Uplight Self Standing Task Light

- 15 ft. integrated power cord
- Lights 15 ft. radius
- 20,000 hour
- 36 watt
- 4 ft.



Heavy Duty Halogen Tripod Work Light

- Bulbs included
- 5 ft. cord
- 18/3 gauge
- 1000 Max wattage
- Extends 6 ft.



Heavy Duty Halogen Portable Work Light

Bulbs included

LED Work Light

• 1500 lumens output

Very low heat output

• 50,000 hours bulb life

- 500 Max wattage
- 18/3 gauge
- 3 ft. cord

VOL08-00704



VOLTEG POWER & LIGHTING

VOL08-00609

Area Hanging Work Light

- Modifiable for 120/208/240/277V
- Lights 60 ft. radius
- 42,000 lumens
- 20,000 hour
- 400 watt



WOBE111400PS

Wobblelight® Portable Jobsite Lighting

- Available in 400 or 175 watt metal halide
- 36"
- 120V accessory plug
- 38,000 lumens



25-40 ft. Radius WOBWL175MH –175 WATT

500-100 ft. Radius WOBWL400MH – 400 WATT

W//BBLELIGHT

Dual-Light Flashlight

- 130 lumens LED
- Flashlight, floodlight, dual-light
- Waterproof
- 3 AA batteries included



NIGHTSTICKNSP-2422R

NIGHT STICK.

Dual-Light Multi-Function Headlamp

- 175 lumens LED
- Spotlight, high/low brightness white floodlight & red floodlight
- Waterproof
- 3 AA alkaline batteries Included



NIGHTSTICKNSP-4612B

NIGHT STICK

Full-Size Rechargeable Dual-Light Flashlight

- 650 lumens LED
- Flashlight, floodlight, dual-light
- Waterproof
- Lithium-ion rechargeable battery included



NIGHTSTICKNSR-9744XL

NIGHT STICK

Safety Light Combo Kit

- 150 lumens LED
- Flashlight, floodlight, dual-light
- 4 AA batteries included
- Kit includes one heavy weighted magnetic base and one red safety cone



Mini-TAC Pro - 2 AAA

- 100 lumens LED
- Momentary or consistent-on
- Waterproof
- 2 AAA batteries included



NIGHTSTICKMT-200

Mini-TAC Pro - 2 AA

- 200 lumens LED
- Momentary or consistent-on
- Waterproof
- 2 AA batteries included



NIGHT STICK

NIGHTSTICKMT-220

Mini-TAC Gooseneck

- 140 lumens LED
- Momentary or consistent-on
- Water resistant
- 2 AA batteries included





NIGHTSTICKMT-130

NIGHT STICK

GENERAL-LIGHTING

L.E.D. Headlight

- 3 AAA batteries included
- Adjustable spot-to-flood beam
- 80 lumens
- 2 headstraps
- Hat clip



RAYOVACRNHL3AAA-B

TODS ZE3

Small Aluminum L.E.D. Flashlight

- 3 AAA batteries included
- With holster
- 200 lumens



RAYOVACRNT3AAA-B

141573



Black Plastic L.E.D. Flashlight

- 2 D batteries included
- 85 lumens
- User friendly slide switch
- 7' drop tested
- Hang ring



141573

RAYOVACRN2D1W-B

Industrial L.E.D. Flashlight

- 2 Heavy duty D batteries included
- 7' drop tested
- Corrosion resistant



MAD Z3

Xtreme L.E.D. Flashlight

- Uses 3 C batteries
- 180 lumens
- 22 hours runtime
- 2 modes: high & low
- Water resistant



RAYOVACSE4W3C

RAYOVAC12DLED-B

Small Indestructible L.E.D. Flashlight

- 3 AAA batteries included
- 2 modes: high & energy saver
- 120 lumens
- 30' drop tested
- Water resistant
- Lifetime warranty



RAYOVACDIY3AAA-B

145573

Indestructible L.E.D. Flashlight

- 2 D batteries included
- 2 modes: high & energy saver
- 140 lumens
- 20' drop tested
- Water resistant
- Lifetime warranty



000573

Indestructible L.E.D. Beam Lantern

- 4 C batteries included
- 2 modes: high & energy saver
- 150 lumens
- 15' drop tested
- Lifetime warranty



RAYOVACDIYBEAM-B

145573

Indestructible L.E.D. Lantern

- 3 modes: high, medium & low
- 500 lumens

RAYOVACDIY2D-B

- Waterproof submersible
- Lifetime guarantee



RAYOVACOT6AASP-B

Extreme L.E.D. Lanterns

- 3 modes: 100%, 50% & strobe
- Water resistant
- Lifetime warranty



Mini



RAYOVACSE3DLNTP 300 lumens

RAYOVACSP1W3AALN-B 70 lumens



1455Z3

Indestructible L.E.D. Lantern

- 3 modes: high, medium & low
- 400 lumens
- Waterproof submersible
- Lifetime warranty



RAYOVACOT3DLN-B



GENERAL- LIGHTING

AAA Alkaline Ultra Pro Batteries

- Available in 8 pack
- Shrink wrapped





RAYOVACAL-AAA

TOTO ZE

AA Alkaline Ultra Pro Batteries

- Available in 8 pack & 24 pack
- Shrink wrapped



1655Z3

RAYOVACAL-AA RAYOVACALAA-24

C Alkaline Ultra Pro Batteries

- Available in 6 pack & 12 pack
- Shrink wrapped





RAYOVACAL-C Rayovacalc-12

MISTE ZE

D Alkaline Ultra Pro Batteries

- Available in 6 pack & 12 pack
- Shrink wrapped





RAYOVACAL-D RAYOVACALD-12

145523

9V Alkaline Ultra Pro Batteries

- Available in 6 pack
- Shrink wrapped





RAYOVACAL-9V

كالأولاف

2032 Contractor Calculator Battery

- Lithium carded size
- 3.0 volt
- Available in 1 pack



RAYOVACCR2032

0455Z3

2016 Contractor Calculator Battery

- Lithium carded size
- 3.0 volt

RAYOVACCR2016

Available in 1 pack



141573

Electronic Lithium Battery

- 3.0 volt
- Available in 1 pack



RAYOVACLR44

₩ VARTA





Jobsite Basics

- □ Labor Law Posters
- Calendars
- □ 2 Way Radios/Chargers
- Marking Paint
- □ Danger Tape
- □ Caution Tape
- □ Signs
- ☐ Flash Lights

First Aid

- ☐ First Aid Kits
- ☐ First Aid Refill Kits
- Burn Kit
- ☐ Heat Stress Kit
- Eyewash Station
- Eyewash Refill
- □ Defibrillators

Heat Stress

- ☐ Straw Hats
- □ Cooling garb
- Shade Tents
- □ Coolers
- ☐ Electrolyte Replacement

Personal Protection

- ☐ Hard Hats
- □ Shields
- ☐ Glasses
- Goggles
- □ Readers
- ☐ Ear Protection
- □ Respiratory
- ☐ Gloves
- ☐ Heavy Duty Pants
- ☐ Heavy Duty Jackets

Work Wear

- □ Concrete Boots
- □ Knee Pads
- □ Rainwear
- □ Jacket
- ☐ Fire Resistant Wear
- ☐ High Vis Wear
- ☐ Class 2
- ☐ Class 3

Fall Protection

- ☐ Harness
- Lanyards
- □ Lifelines
- Adaptors
- Anchors
- ☐ Hoist Systems
- □ Guardrail Systems
- Ladders
- Rigging

Prevention

- ☐ Fire Extinguishers
- ☐ Dust Prevention
- Builder Board
- Rebar Caps
- Atmosphere Control

Storage

- □ Containment Kits
- □ Safety Cabinets
- ☐ Fuel Cans

Clean Up

- ☐ Shovels
- □ Hammers
- □ Picks
- □ Brooms/Brushes
- ☐ Floor Sweep
- □ Trash Cans
- □ Cleaning Products
- Cleaning Cloths
- □ Vacuums
- □ Scrapers
- □ Concrete Cleaner


Traffic Safety

- Barricades
- Delineators
- Construction Signs
- ☐ Warning Panels
- □ Speed Bumps

GENERAL- FLOOR PROTECTION

Builder Board Floor Protection

- Roll size 38" x 100'
- Water resistant
- Allows maximum breathability
- Easy to install
- 100% recyclable





Clean Mat Adhesives Sheets

- Size 24" x 36"
- Tacky surface to remove dirt from footwear
- Mat contains 30 tabbed sheets for easy removal



SURCM2436W4

Water Shield Reinforced Kraft Paper

- Construction grade
- Protects floors, cabinets and counter tops
- Non staining





Carpet Shield Adhesives Film

- Protects during construction
- Does not move or shift
- Tear and puncture resistant

SURCS24200L - 24" X 200' SURCS36200 - 36" X 200' SURCS36500 - 36" X 500' SURCS48500 - 48" X 500'





Pro Shield Felt Mat

- Size 36" x 100'
- Slip resistant, lightweight and flexible
- Reusable

SURWS36300

Highly absorbent



SURPS36100

Trim Tape Multi Purpose

- Pliable for easy application
- Works on metal, aluminum, vinyl clad & glass surfaces
- Does not tear upon removal
- 6 mil

SURTS4108C - 4" X 108" SURTS6108C - 6" X 108"



Shoe Covers

- One size fits most
- Elastic closure
- Cloth skid resistant bottom
- Protects floors

SURSC300 -100 PAIRS SURSC3001PB -10 PAIRS





GENERAL- DUST PREVENTION

4 Pack Plus Kit

• Includes: (4) 12' aluminum poles, (4) non slip disks, (2) 5' foam crossbars, (2) 7' standard zippers & carrying bag



12' Spring Loaded Poles 2 Pack

- Includes: (2) 12' aluminum poles
- (4) non slip disks



12' Spring Loaded Poles 6 Pack

- Includes: (6) 12' aluminum poles
- (6) non slip disks



20' Poles 6 Pack

- Includes: (2) 20' aluminum poles
- (2) non slip disks



Heavy Duty Zippers 2 Pack

- Includes: (2) 7' adhesive zippers
- (2) flap hooks to hold door flap
- Zipper knife sheeting cutter



TIMMATT

Standard ZipDoor Kit

- For standard doors 3' x 7'
- (2) heavy duty zippers pre-installed
- Includes: double sided tape
- 4 mil plastic sheeting




ZIPWALLZDS



GENERAL- CLEAN UP

Finishing Broom

- 24"
- Trim length 2-1/2"
- Pure soft grey horsehair
- Foam plastic block



Floor Broom

- 24"
- Trim length 3"
- Steel wire & tampico center
- Black horsehair & plastic border
- Hardwood block



MAG1724A



Coarse Brown Plastic Broom

- 24"
- Trim length 3"
- Hardwood block



MAG2224AY



Pavement Broom

- 24"
- Trim length 4"
- Brown Palmyra
- Hardwood block



MAG1424A



Blue Street Broom

- 18"
- Trim length 4-1/2"
- Heavy gauge blue plastic
- Hardwood block



MAG6418A



Alpine Floor Broom

- 24"
- Trim length 3"
- Flagged tip silver grey plastic
- Hardwood block



MAG3724A



Heavy Duty Street Broom

- 24"
- Trim length 4-1/2"
- Heavy gauge plastic
- Hardwood block



Polypropylene Deck Brush

- 10"
- Trim length 2"
- Acid Proof
- Hardwood block



MAG310Y



Warehouse Broom

- Broom corn and fibre
- Sewn 4 times
- Wire band reinforced
- Heavy duty handle



MAG5036



MAG1324A

Magnolia Brush

Mason Acid Brush

- 8-1/4" L x 3" W
- Trim length 1-1/4"
- Heavily filled white tampico
- Hardwood block



MAG179T



Concrete Finishing Brush

- 12"
- Trim length 2"
- Soft Horsehair
- Hardwood block



MAG190



Beaver Tail Counter Duster

- 9"
- Trim length 2-1/2"
- Fiber is staple set
- Hardwood block
- Hang up hole



MAG56



Short Handle Acid Brush

- 8-1/2"
- Trim length 2"
- Clear plastic
- Polypropylene block



Long Handle Acid Brush

- 20"
- Trim length 2"
- Yellow plastic
- Polypropylene block



Rocker Back Wire Brush

- 7-1/4" L x 2-1/2" W
- Trim length 1-1/8"
- Tempered carbon steel wire
- Hardwood block



MAG3S



Wire Brush

- Round carbon steel wire
- Hardwood block

Short Handle





No Scrapper MAG1-S



Boot Cleaner Block

- 9" x 4-3/4"
- Three piece solid injection molding
- Black polypropylene bristle base
- Blue polypropylene bristle sides



MAGSB1000



Whisk Broom

- 11' corn
- Sewed two times
- Plated ring cap



MAG228



GENERAL- CLEAN UP

Aluminum Dust Pan

- 17" width holds more debris
- All aluminum pan and handle
- Lightweight



Metal Dust Pan

- 16" edge
- 20 gauge black metal steel
- Baked enamel finish



MAG7

Magnolia Brush

Scoop Shovel

- 29" handle with D grip
- 18-3/4" aluminum blade



UNI53134

UnionTools

Straight Floor Squeegee

- Available in 24" or 36"
- Black rubber
- Tapered handle socket
- Hardwood block



MAG4124TP -24" MAG4136TP -36"



Heavy Duty Handle Brace

- Made of aluminum bar stock
- Complete with all hardware




MAG99



Broom Handles

- 5' long x 1-1/8" diameter
- Straight grained hardwood
- Clear lacquered finish



Threaded

MAGHANDLET



Metal Tip Threaded Handle

- 5' long x 1-1/8" diameter
- Straight grained hardwood
- Clear lacquered finish
- Crimped on metal thread



MAGB60



Red Sweeping Compound

- Heavy Duty
- Odor free
- Non staining



50 lbs.

55 Gal. Drum SWEEPCOMP1300



Green Sweeping Compound

- Wax based
- Odor free
- Non staining





50 lbs. SWEEPCOMPGRN

55 Gal. Drum GREENSWEEP-55



Crystal Simple Green® Industrial Cleaner

- Non-toxic and biodegradable
- No color or added scent
- Non-flammable



Available in 55 & 275 gal totes

SIMPLE19024 - 24oz SIMPLE19128 - 1gal

Extreme Simple Green® Precision Cleaner

- Non-toxic and biodegradable
- Residue-free rinsing
- Non-flammable

Available in 55 & 275 gal totes





SIMPLE13412 - 32oz SIMPLE13406 - 1gal

Simple Green Lime Scale Remover

- Dissolves soap scum, hard water stains and mineral deposits
- Non-abrasive, non-flammable
- Non-fuming, no bleach or ammonia

Available in 55 gal totes

SIMPLE50128 - 1gal







- Non-toxic and biodegradable
- Use with or without water
- Contains pumice, lanolin







SIMPLE42150 - 5oz SIMPLE42128 -1gal

Simple Green Stone Cleaner

- Non-toxic and biodegradable
- Non-abrasive
- Streak free formulas



SIMPLE18401 - 32oz



- Non-toxic and biodegradable
- Non-hazardous, non-flammable
- Non-abrasive, non-corrosive
- No color or added scent



SIMPLE19010 - 20oz

Simple Green Safety Towels®

- Non-toxic, biodegradable fluid
- Non-toxic, biodegradable
- No color or added scent
- Pre-moistened with Crystal Simple Green



SIMPLE513351 - 75 count





GENERAL- CLEAN UP

Low-Lint Cleaning Cloths

- Flexible, drapable
- Works well with solvents, detergents and disinfectants



TORK192479



Industrial Heavy-Duty Cleaning Cloth

- Protects hands from heat and metal scraps
- High absorption capacity
- Works well with most solvents,



TORK570178



ShopMax™ Wiper Shop Towel Roll

- 60 count, low linting
- Strong enough for oil, grease and solvents
- Thick, cloth-like construction is highly absorbent



TORK

ShopMax™ Wiper Shop Towels

- 200 count
- Dispensing disk for single towel dispensing
- Durable plastic container



TORK450340



High Performance Floor Stand Dispenser

Metal and plastic construction

1 roll dispenser capacity

Portable

TORK450360



TORK6520281

Cleaning Industrial Cloths

- Can be used with floor stand dispenser
- 950 count giant roll
- 1 ply



TORK520304



Terry Cloth Rags

- 25 lbs. 16" x 19"
- Constructed of looped terry



T-Shirt Rags

- 25 lbs.
- Cotton- blend T-shirt remnants



RAGTSHIRT-25

RAGTERRY-25

CREDIT APPLICATION AND AGREEMENT



Date:	_
Territory:	
Credit Amount Requested: \$	

7635 Burnet Avenue, Van Nuys, CA 91405 818.780.1464 Fax: 818.780.3790

Company Name:						
Officer/Individual Name:						
Address(shipping):	City:	State:	Zip:			
Billing Address, if different from	above:					
Phone:	Cell:	Fax: _				
Web site:	Email address:					
Accounts Payable Contact:		Phone No:				
Check Appropriate Legal Entity:	Corporation	Proprietorship	LLC			
If LLC, Name of Managing Mem	ber:					
Corporate/Fed Tax id #:	Re	esale #: (if applicable)_				
Contractors License #:	Na	Name on License:				
ype of Business: At Present Location Since: Rent/Own						
	Vice Pres:	Trea	sure:			
Officer Names – Pres:						
Officer Names – Pres: Are PO's Required? Yes						
	No	<u> </u>				
Are PO's Required? Yes	No e your invoices? (Please	— check a box below)	Mail:			
Are PO's Required? Yes . How would you prefer to receive	No e your invoices? (Please	— check a box below) Fax:	Mail:			
Are PO's Required? Yes . How would you prefer to receive	No e your invoices? (Please s BANK CREDIT REFE	 check a box below) Fax: ERENCES				
Are PO's Required? Yes How would you prefer to receive Email: if so, email addres	No e your invoices? (Please s BANK CREDIT REFE	 check a box below) Fax: ERENCES Phone:				
Are PO's Required? Yes How would you prefer to receive Email: if so, email addres Name of Bank:	No e your invoices? (Please of s BANK CREDIT REFE	check a box below)Fax: ERENCESPhone:Savings Acct #: _				
Are PO's Required? Yes How would you prefer to receive Email: if so, email addres Name of Bank: Type of Account: Checking A Loan: Re	No e your invoices? (Please of s BANK CREDIT REFE	check a box below) Fax: ERENCES Phone: Savings Acct # : _				
Are PO's Required? Yes How would you prefer to receive Email: if so, email addres Name of Bank: Type of Account: Checking A Loan: Re	No e your invoices? (Please of section		Since:			
Are PO's Required? Yes How would you prefer to receive Email: if so, email address Name of Bank: Type of Account: Checking A Loan: Re 3 TR 1) Company Name	No e your invoices? (Please of second		Since:			
Are PO's Required? Yes How would you prefer to receive Email: if so, email addres Name of Bank: Type of Account: Checking A Loan: Re	No e your invoices? (Please of second		Since:			
Are PO's Required? Yes How would you prefer to receive Email: if so, email addres Name of Bank: Type of Account: Checking A Loan: Re 1) Company Name Address	BANK CREDIT REFE	check a box below) Fax: ERENCES Phone: Savings Acct # : _ ICES REQUIRED Account # Fax	Since:			
Are PO's Required? Yes How would you prefer to receive Email: if so, email address Name of Bank: Type of Account: Checking A Loan: Re 3 TR 1) Company Name	BANK CREDIT REFE	check a box below) Fax: ERENCES Phone: Savings Acct # : _ ICES REQUIRED Account # Fax Account #	Since:			
Are PO's Required? Yes How would you prefer to receive Email: if so, email address Name of Bank: Type of Account: Checking A Loan: Re 3 TR 1) Company Name Address 2) Company Name Address Address	No e your invoices? (Please of second properties) BANK CREDIT REFERENCE: presentative: Phone Phone		Since:			
Are PO's Required? Yes How would you prefer to receive Email: if so, email address Name of Bank: Type of Account: Checking A Loan: Re 3 TR 1) Company Name Address 2) Company Name 2) Company Name 2	No e your invoices? (Please of second properties of the presentative: ADE CREDIT REFERENCE Phone Phone		Since:			


Terms and Conditions of Application for Credit


Name:

- 1. Applicant hereby certifies all above statements are true and correct and authorizes Arrow Tools to contact all credit references.
- 2. All invoices are to be paid within 30 days. All overdue invoices will be subject to a service charge of 1 1/2% per month, which the applicant agrees to pay.
- 3. Applicant will notify Arrow Tools of any changes in ownership of above company immediately.
- 4. Applicant agrees remittance shall not be delayed or withheld because of unsettled claims or other disputes, which shall be handled separately from the account for transportation and related charges.
- 5. Applicant agrees account will be placed on COD if invoices are not paid within Net 30 terms. Applicant also agrees to supply Arrow Tools with Prelim information within 5 days of request and Arrow Tools shall have lien rights on jobs in an attempt to collect on past due invoices.
- 6. In the event Arrow Tools deems it necessary to utilize the service of an outside collection agency or an attorney to collect on any outstanding debts, the applicant agrees to pay all collection cost, attorney fees and court costs.
- 7. The undersigned agrees to indemnify and hold harmless Arrow Tools from and against any and all demands, liabilities, costs, penalties, obligations, damages, and expenses or any nature arising due to products sold or supplied and further understands Arrow Tools is not responsible for the use or misuse of any materials, products, goods, tools and equipment sold.

Signature:

Date:		Title:					
<u>Personal Guarantee</u>							
In consideration for the external and/or hardware to the fore obligations due and owing to be affected by any compronside by the purchaser. The non-performance and notice brought upon the guarantee possession of the above de of the amount has been madue bear interest at legal ratherein, purchaser agrees to	named firm, I/we in by said firm and incomise settlement or e undersigned waives of any other kind from the court ori- scribed property rede. Invoice payablete. Should it be ne	ndividually and join dividual to you. Any any variation of ter ves notice of accept d and nature, and ginally acquiring ju emains with the se de upon presentation	ntly agree guaranted y liability of the und rms of any sales or otance, notices of n waives the right to urisdiction. Title and on. Accounts more	e payment of all lersigned shall not rental contract non-payment, and remove any action dright of immediate implete payment than 30 days past			
Name:		Signature: _					
Date:		Title:					
Home Phone							
Home Address		City	St	Zip			
D.L.#			Veh Lic #				
Spouse Name							
D.L.#	SS#		Veh Lic #				
Salesperson	Date:	CREDIT DEPARTMENT ONLY Date: Credit Approved: Denied:					
	Approved By: .		Account#	:			

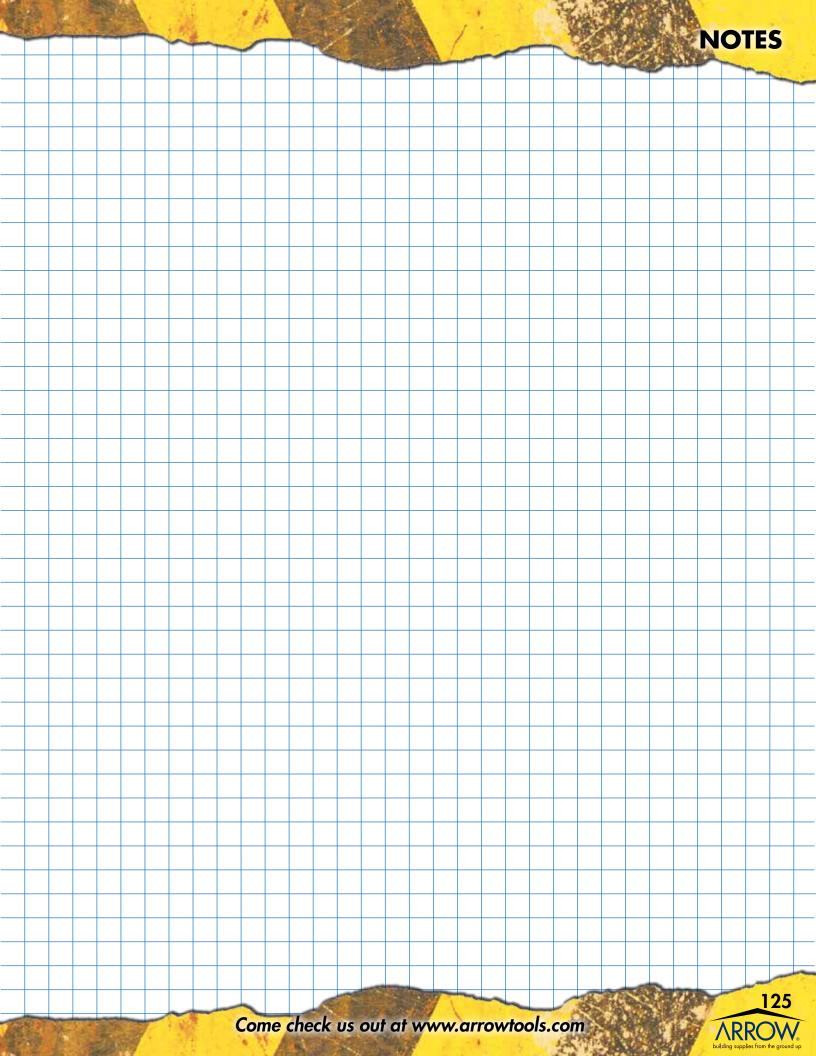









LOS ANGELES

7635 Burnet Avenue Van Nuys, CA 91405 (818) 780-1464

ORANGE COUNTY

1335 South Claudina Street Anaheim, CA 92805 (714) 204-3200

